

# Exact model reduction by a slow–fast decomposition of nonlinear mechanical systems

George Haller · Sten Ponsioen

Received: 17 November 2016 / Accepted: 18 July 2017 / Published online: 8 August 2017  
© Springer Science+Business Media B.V. 2017

**Abstract** We derive conditions under which a general nonlinear mechanical system can be exactly reduced to a lower-dimensional model that involves only the softer degrees of freedom. This slow–fast decomposition (SFD) enslaves exponentially fast the stiffer degrees of freedom to the softer ones as all oscillations converge to the reduced model defined on a slow manifold. We obtain an expression for the domain boundary beyond which the reduced model ceases to be relevant due to a generic loss of stability of the slow manifold. We also find that near equilibria, the SFD gives a mathematical justification for two modal reduction methods used in structural dynamics: static condensation and modal derivatives. These formal reduction procedures, however, are also found to return incorrect results when the SFD conditions do not hold. We illustrate all these results on mechanical examples.

**Keywords** Model reduction · Invariant manifolds · Slow–fast systems

## 1 Introduction

While often hoped otherwise, a typical multi-degree-of-freedom mechanical system cannot necessarily be

reduced to a lower-dimensional model. There is often a good reason why the original model involves several degrees of freedom, all of which are essential to reproduce the dynamics at the required level of accuracy.


For any multi-degree-of-freedom system, projections to various linear subspaces are, nevertheless, routinely employed for model reduction purposes (see Besselink et al. [4] for a review of techniques in structural vibrations, Benner et al. [3] for a more general survey). Most often, however, the accuracy or even the fundamental validity of these procedures is a priori unknown. The main reason is that distinguished subspaces identified from linearization or other considerations are generally not invariant under the nonlinear dynamics. As a consequence, trajectories of the full system do not follow those of a projection-based model, as shown in Fig. 1.

A model reduction principle can be justified in a strict mathematical sense if the reduced model is defined on an invariant set of the full nonlinear system, and hence model trajectories are actual trajectories of the full system. In addition, the invariant set carrying the model dynamics should be robust and attracting for the reduced model to be of relevance for typical trajectories. While numerical or perturbative approximations to such a set will at best be approximately invariant, the attractivity of the actual invariant manifold is expected to keep the impact of non-invariance small, driving trajectories toward the actual invariant set.

Motivated by these considerations, we propose here two requirements for mathematically justifiable and

---

G. Haller (✉) · S. Ponsioen  
Institute for Mechanical Systems, ETH Zürich,  
Leonhardstrasse 21, 8092 Zurich, Switzerland  
e-mail: georgehaller@ethz.ch

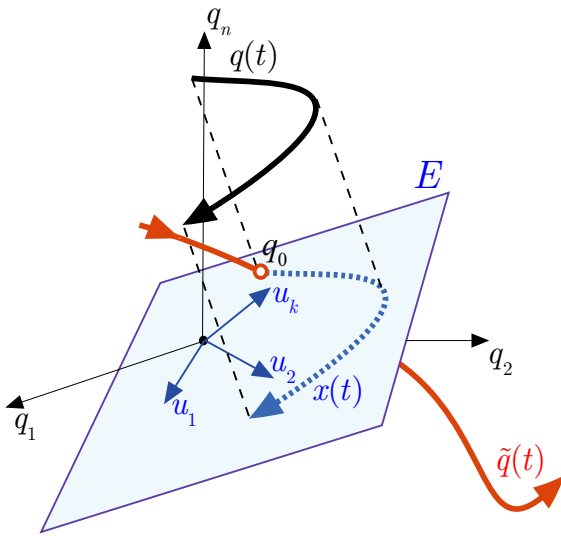

**Fig. 1** Model reduction by projection of a full trajectory  $q(t)$  onto a  $k$ -dimensional subspace  $E$ , typically spanned by a few eigenvectors  $u_1, \dots, u_k$  of the linearized system at the origin. The model trajectory  $x(t)$  starting from a point  $q_0 \in E$  is constrained to lie in  $E$ , but the full trajectory  $\tilde{q}(t)$  starting from  $q_0$  will generally leave the plane  $E$

robust model reduction in a nonlinear, non-autonomous mechanical system:

- (R1) There exists an attracting and persistent lower-dimensional forward-invariant manifold  $\mathcal{M}(t)$ . Along the manifold  $\mathcal{M}(t)$ , the modeled degrees of freedom (with generalized coordinates  $y$  and velocities  $\dot{y}$ ) are smooth functions of the modeling degrees of freedom (with generalized coordinates  $x$  and velocities  $\dot{x}$ ).
- (R2) General trajectories approaching  $\mathcal{M}(t)$  synchronize with model trajectories at rates that are faster than typical rates within  $\mathcal{M}(t)$ .

By the requirement (R1), the construction of a smooth, lower-dimensional dynamical model should be equivalent to a reduction to a lower-dimensional invariant manifold, as illustrated in Fig. 2a. The dynamics on this manifold, however, is only relevant for the full system dynamics if nearby motions  $q(t)$  approach model trajectories on  $\mathcal{M}(t)$ , i.e., the manifold has a domain of attraction foliated by stable manifolds of individual model trajectories. In addition, we require  $\mathcal{M}(t)$  to be persistent (robust under small perturbations) since mechanical models have inherent parameter uncertainties and approximations, and a model reduction should be robust with respect to these.


Requirement (R2) ensures that full system trajectories not only approach the set of model trajectories in the phase space, but also synchronize with specific model trajectories. Consider, for example, a linear, two-degree-of-freedom mechanical system with an asymptotically stable fixed point at the origin. The fast stable manifold  $\mathcal{M}$  of this fixed point (cf. Fig. 2b) is invariant, attracting and persistent, even unique (see, e.g., Cabre et al. [5]). Yet, the dynamics on  $\mathcal{M}$  fails to act as a faithful reduced-order model for the typical near-equilibrium dynamics. Indeed, the flow on  $\mathcal{M}$  predicts a fast decay rate that is unobservable along typical trajectories on their way to the fixed point. This is because general trajectories first approach the  $(x, \dot{x}) = (0, 0)$  subspace, then creep toward the origin more slowly, synchronizing with motions along this subspace, rather than with those in  $\mathcal{M}$ .

In contrast, the invariant manifold  $\bar{\mathcal{M}}$  in Fig. 2b satisfies both (R1) and (R2) and is indeed a good choice for model reduction. This is ensured by a dichotomy of timescales created by the gap in the real part of the spectrum of the eigenvalues of the fixed point. The larger this gap, the more efficient the reduced-order model in predicting typical system behavior.

In a nonlinear system, one generally loses the local slow–fast dichotomy of timescales that may arise near fixed points, such as the one in Fig. 2b. A global reduced-order model with the properties (R1)–(R2) will, therefore, not exist unless the slow–fast timescale difference created locally by the fixed point extends to a larger domain of the phase space. In more mechanical terms, a global model reduction is only feasible when the  $x$  variables stay globally stiffer (i.e., faster) than the  $y$  variables.

Such a global slow–fast partition of coordinates has been assumed in several case studies of mechanical systems, such as an undamped spring coupled to a pendulum (Georgiou and Schwartz [9]) and its extensions to higher or even infinitely many dimensions (Georgiou and Schwartz [12], Georgiou and Vakakis [10]). These studies tacitly assume the existence of a slow manifold without specific consideration to its stability and robustness. Due to a lack of normal hyperbolicity for the limiting slow manifold (critical manifold), well-defined invariant slow manifolds do not actually exist in these mechanical models. Recent results guarantee only near-invariant surfaces under certain conditions (MacKay [22], Kristianssen and Wulf [20]). These surfaces, however, do not attract trajectories from an open

**Fig. 2** **a** Illustration of the geometry of requirements (R1) and (R2) for model reduction in a mechanical system with generalized coordinates  $q$  and associated velocities  $\dot{q}$ . The reduced model depends only on a smaller group of degrees of freedom, described by the position vector  $x$  and the corresponding velocity vector  $\dot{x}$ . The remaining degrees of freedom are characterized by the positions  $y$  and velocities  $\dot{y}$ . **b** An attracting and persistent invariant manifold  $\mathcal{M}$  that does not provide a faithful reduced-order model for the full system dynamics

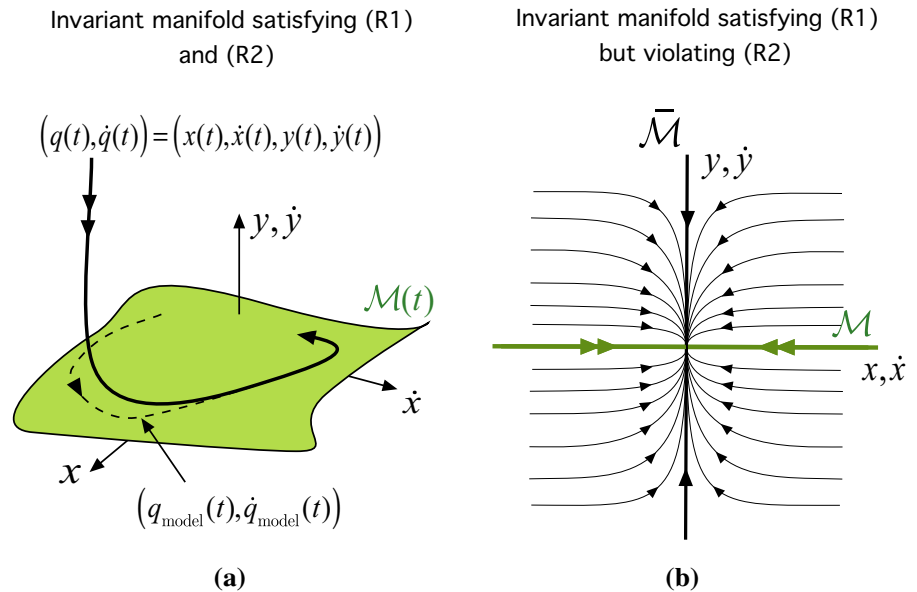

neighborhood of the phase space. As a result, their relevance for model reduction is a priori unclear, as they violate the requirement (R1).

As a further case study, a forced and stiff linear oscillator coupled to a softer nonlinear oscillator was considered by Georgiou et al. [8, 11]. As the authors observe, the existence of an attracting, two-dimensional slow manifold in these two studies follows from a globalized version of the center manifold theorem (Carr [6]) and from the geometric singular perturbation formulation of Fenichel [7], respectively. These approaches are similar in spirit to the work we describe here, but pertain to specific, low-dimensional, soft–stiff mechanical models without targeting model reduction issues per se.

Related work also includes that of Lubich [21], who developed a numerical scheme for mechanical systems with very stiff potential forces. In this context, all degrees of freedom are equally fast and hence no oscillatory mode can be enslaved to the rest via model reduction. An exceptional slow manifold (which involves coordinates from all degrees of freedom) becomes attracting only under the numerical scheme. A numerical procedure is introduced for approximating such slow manifolds in more general but still uniformly stiff mechanical systems by Ariel et al. [1]. In a more mathematical treatment, Stumpp [26] considered general mechanical systems with stiff damping forces and showed the existence of an attracting slow

manifold governing the asymptotic behavior of the system. Again, all degrees of freedom are assumed equally stiff, and hence, no modes can be eliminated via model reduction.

In contrast to these specific case studies and purely stiff reduction procedures, we consider here general mechanical systems and establish conditions under which stiffer degrees of freedom can be identified and eliminated by reduction to an attracting slow manifold defined over the remaining softer degrees of freedom. We do not assume any specific force or inertia term to be large or small. Rather, we seek the broadest set of conditions under which an exact slow–fast decomposition emerges and yields a reduced-order mechanical system. The SFD procedure arising from our analysis satisfies the key requirements (R1)–(R2) discussed above.

We also establish the maximal domain of SFD and give a specific upper bound on the rate at which general solutions synchronize with those of the reduced-order model. Our includes several classes of mechanical systems and justifies earlier heuristic reduction schemes under certain conditions. In particular, under the SFD conditions, the techniques of static condensation and modal derivatives, respectively, can rigorously be justified as first- and second-order local approximations to a slow manifold near an equilibrium. At the same time, we give examples of these reduction procedures fail when the SFD conditions are not met.

We illustrate these results on simple mechanical systems, but our formulas are explicit enough to be applied to higher-degree-of-freedom problems. Importantly, determining the eigenvalues and modes shapes is not a prerequisite for the application of SFD. Indeed, the stiffer modes may be fully (both linearly and nonlinearly) coupled to the rest of the modes.

## 2 Setup

### 2.1 General form of the mechanical system

Consider a  $n$ -degree of freedom, non-dimensionalized mechanical system of the form

$$M(q, t)\ddot{q} - F(q, \dot{q}, t) = 0, \quad (1)$$

where  $M \in \mathbb{R}^{n \times n}$  is a nonsingular mass matrix that may depend on the generalized coordinates  $q$  and the time  $t$  in a smooth fashion (class  $C^r$  for some  $r \geq 2$ ). The internal and external forces acting on the system are contained in the term  $F \in \mathbb{R}^n$ , which generally depends on  $q$ ,  $t$  and the generalized velocities  $\dot{q} \in \mathbb{R}^n$ .

### 2.2 Classic model reduction by projection to a subspace

As noted in the Introduction, model reduction for system (1) is generally motivated by an assumed coordinate change

$$q = Ux, \quad (2)$$

with a matrix  $U \in \mathbb{R}^{n \times k}$  and a reduced coordinate vector  $x \in \mathbb{R}^k$  with  $k < n$  (see, e.g., Geradin and Rixen [13]). Substitution into (1), followed by a multiplication by  $U^T$ , then suggests the reduced equations of motion

$$U^T M(Ux, t)U\ddot{x} - U^T F(Ux, U\dot{x}, t) = 0, \quad (3)$$

the projection of (1) from the full state space  $\mathbb{R}^n$  onto a  $k$ -dimensional subspace  $E$ , parametrized by the variable  $x$  (cf. Fig. 1). The main focus of model reduction studies is then the most expedient choice of the matrix  $U$ .

It is often forgotten, however, that for Eq. (3) to hold, one must have  $q(t) = Ux(t)$  for all times, i.e.,  $E$  must be an invariant plane for (1). This assumption is practically certain to be violated unless special symmetries are present. Even for unforced and stable struc-

tural system (i.e., when (1) is autonomous and  $q = 0$  is asymptotically stable), the invariance of modal subspaces is violated when nonlinear terms are present. The mismatch between modal subspaces and (nonlinear) invariant manifolds emanating from the origin will only be small very close to the origin. In addition, various choices of  $U$  may render projected equations that do not capture typical dynamics even close to  $q = 0$  (cf. Haller and Ponsioen [15] and Sect. 5 below for examples).

### 2.3 Slow (softer) and fast (stiffer) variables

If system (1) is non-autonomous, we assume that its explicit time dependence in  $M$  and  $F$  is precisely one of the following three types: (1) periodic (2) quasiperiodic with finitely many rationally independent frequencies (3) aperiodic over a finite time interval  $[a, b]$ . In the periodic and quasiperiodic cases, we let  $t \in \mathcal{T} = \mathbb{R}$ , whereas in the aperiodic case, we let  $t \in \mathcal{T} = [a, b]$ .

Next, we split the generalized coordinate vector  $q$  as

$$q = \begin{pmatrix} x \\ y \end{pmatrix}, \quad x \in \mathbb{R}^s, \quad y \in \mathbb{R}^f, \quad s + f = n,$$

into yet unspecified *slow coordinates*  $x$  and *fast coordinates*  $y$ . This slow–fast partition refers to the expected relative speed of variation of the  $x$  and  $y$  variables. In mechanical terms, we expect  $x$  to label relatively softer degrees of freedom as opposed to the relatively stiff degrees of freedoms labeled by the  $y$  coordinates.

We seek conditions under which a mathematically rigorous model reduction process exists to express  $y(t)$  uniquely as function of  $x(t)$ , at least asymptotically in time, along general trajectories  $q(t)$  of (1). The  $(x, y)$  partition of  $q$  may be suggested by a modal analysis of the linear system or simply by the physics of a mechanical problem. Importantly,  $q$  is not assumed to be a set of linear modal coordinates, and hence our procedure does not rely on an a priori identification of a linearized spectrum near an equilibrium point.

To allow for a potentially stiff dependence of the system on  $y$ , we introduce a small, non-dimensional parameter  $\epsilon > 0$  and consider  $M$  and  $F$  as smooth functions of  $y/\epsilon$  and  $y$  for  $\epsilon > 0$ . At this point, this represents no loss of generality, given that *any* smooth function of  $y$  and  $\epsilon$  can also be viewed as a smooth function of  $y/\epsilon$  and  $\epsilon$  for  $\epsilon > 0$  because  $y = \epsilon \cdot (y/\epsilon)$ .

**Remark 1** The introduction of the small variable  $\epsilon$  through the identity  $y = \epsilon \cdot (y/\epsilon)$  above reflects expected stiff behavior with respect to the  $y = 0$  position in the  $y$  degrees of freedom. If, instead, one expects stiff behavior (small displacements) with respect to a more general  $y = y_0 \neq 0$  position, then one should first let  $\tilde{y} = y - y_0$  and then drop the tilde before introducing the dummy variable  $\epsilon$  as above.

Using the notation introduced above, we split the mass matrices and forcing terms in (1) by letting

$$M(q, t) = \begin{pmatrix} M_{11}(x, \frac{y}{\epsilon}, t; \epsilon) & M_{12}(x, \frac{y}{\epsilon}, t; \epsilon) \\ M_{21}(x, \frac{y}{\epsilon}, t; \epsilon) & M_{22}(x, \frac{y}{\epsilon}, t; \epsilon) \end{pmatrix},$$

$$F(q, \dot{q}, t) = \begin{pmatrix} F_1(x, \dot{x}, \frac{y}{\epsilon}, \dot{y}, t; \epsilon) \\ F_2(x, \dot{x}, \frac{y}{\epsilon}, \dot{y}, t; \epsilon) \end{pmatrix}, \quad \epsilon > 0,$$

where  $M_{11} \in \mathbb{R}^{s \times s}$ ,  $M_{12}, M_{21}^T \in \mathbb{R}^{s \times f}$ ,  $M_{22} \in \mathbb{R}^{f \times f}$ ,  $F_1 \in \mathbb{R}^s$  and  $F_2 \in \mathbb{R}^f$ . Again, as notated above, this notation is general enough to allow for cases in which  $M$  or  $F$  depends purely on  $y$ , or depends both on  $y$  and  $y/\epsilon$ . The corresponding equations of motion are

$$\begin{aligned} M_{11}\ddot{x} + M_{12}\ddot{y} - F_1 &= 0, \\ M_{22}\ddot{y} + M_{21}\ddot{x} - F_2 &= 0. \end{aligned} \quad (4)$$

Taking appropriate linear combination of these equations, and introducing the matrix  $M_i$  and forces  $Q_i$  via

$$\begin{aligned} M_i \left( x, \frac{y}{\epsilon}, t; \epsilon \right) &= M_{ii} - M_{ij} M_{jj}^{-1} M_{ji}, \\ i, j &= 1, 2, \quad i \neq j, \\ Q_i \left( x, \dot{x}, \frac{y}{\epsilon}, \dot{y}, t; \epsilon \right) &= F_i - M_{ij} M_{jj}^{-1} F_j, \\ i, j &= 1, 2, \quad i \neq j, \end{aligned} \quad (5)$$

we deduce from (4) the inertially decoupled equations of motion:

$$\begin{aligned} M_1 \left( x, \frac{y}{\epsilon}, t; \epsilon \right) \ddot{x} - Q_1 \left( x, \dot{x}, \frac{y}{\epsilon}, \dot{y}, t; \epsilon \right) &= 0, \\ M_2 \left( x, \frac{y}{\epsilon}, t; \epsilon \right) \ddot{y} - Q_2 \left( x, \dot{x}, \frac{y}{\epsilon}, \dot{y}, t; \epsilon \right) &= 0. \end{aligned} \quad (6)$$

Importantly, Eq. (6) is fully equivalent to (1) for any choice of the partition  $q = (x, y)$  and for any choice of a scalar parameter  $\epsilon > 0$ . In particular,  $M_1(x, \frac{y}{\epsilon}, t; \epsilon) \in \mathbb{R}^{s \times s}$  and  $M_2(x, \frac{y}{\epsilon}, t; \epsilon) \in \mathbb{R}^{f \times f}$  are nonsingular matrices for all  $(x, y, t)$  and for all  $\epsilon > 0$ . As we shall see in later examples, the partition  $q = (x, y)$  will need to be selected in given problems in a way that further assumptions detailed below are satisfied.

## 2.4 Assumptions of the SFD and illustrating examples

We now list assumptions that will be sufficient to guarantee the existence of an exact reduced-order model satisfying the requirements (R1)–(R2). First, using the new variable  $\eta = y/\epsilon$ , we define the mass-normalized forcing terms

$$\begin{aligned} P_1(x, \dot{x}, \eta, \dot{\eta}, t; \epsilon) &= M_1^{-1}(x, \eta, t; \epsilon) Q_1(x, \dot{x}, \eta, \dot{\eta}, t; \epsilon), \\ P_2(x, \dot{x}, \eta, \dot{\eta}, t; \epsilon) &= \epsilon M_2^{-1}(x, \eta, t; \epsilon) Q_2(x, \dot{x}, \eta, \dot{\eta}, t; \epsilon), \end{aligned}$$

which are, by our assumptions, class  $C^r$  in their arguments for  $\epsilon > 0$ . The following assumptions concern properties of  $P_i$  in their  $\epsilon = 0$  limit.

**(A1) Nonsingular extension to  $\epsilon = 0$ :** The functions  $P_1$  and  $P_2$  are at least of class  $C^2$  in their arguments at  $\epsilon = 0$ .

In other words, assumption (A1) requires continuous differentiability of the transformed forcing terms  $P_i$  also in the limit of  $\epsilon = 0$ , when the dummy variable  $\eta = y/\epsilon$  is held fixed, independent of  $\epsilon$ .

**(A2) Existence of a fast zero-acceleration set (critical manifold):** The algebraic equation  $Q_2(x, \dot{x}, \eta, 0, t; 0) \equiv 0$  can be solved for  $\eta$  on an open, bounded domain  $\mathcal{D}_0 \subset \mathbb{R}^s \times \mathbb{R}^s \times \mathcal{T}$ . Specifically, there exists a  $C^1$  function  $G_0 : \mathcal{D}_0 \rightarrow \mathbb{R}^s$  such that

$$Q_2(x, \dot{x}, G_0(x, \dot{x}, t), 0, t; 0) \equiv 0 \quad (7)$$

holds for all  $(x, \dot{x}, t) \in \mathcal{D}_0$ . We refer to the set  $\mathcal{M}_0(t)$  defined by  $\eta = G_0(x, \dot{x}, t)$  as a *critical manifold*.

Assumption (A2) ensures the existence of a smooth set  $\mathcal{M}_0(t)$  of instantaneous zero-acceleration states (critical manifold) for the fast coordinates. Here the velocity variable  $\dot{x} \in \mathbb{R}^s$  is viewed as arbitrary, and hence unrelated to the actual time derivative of  $x(t)$  along a trajectory  $q(t)$ . As a consequence, these instantaneous zero-acceleration states are not equilibria and do not form an invariant set for system (6). Under assumption (A3) below, however,  $\mathcal{M}_0(t)$  will turn out to approximate a slow invariant manifold that carries a reduced-order model satisfying the requirements (R1)–(R2):

**(A3) Formal asymptotic stability of the critical manifold:** With the matrices

$$\begin{aligned} A(x, \dot{x}, t) &= -\partial_{\dot{y}} P_2(x, \dot{x}, G_0(x, \dot{x}, t), 0, t; 0), \\ B(x, \dot{x}, t) &= -\partial_{\eta} P_2(x, \dot{x}, G_0(x, \dot{x}, t), 0, t; 0), \end{aligned} \quad (8)$$



the equilibrium solution  $u \equiv 0 \in \mathbb{R}^f$  of the unforced, constant-coefficient linear system

$$u'' + A(x, \dot{x}, t)u' + B(x, \dot{x}, t)u = 0 \quad (9)$$

is asymptotically stable for all fixed parameter values  $(x, \dot{x}, t) \in \mathcal{D}_0$ . Here prime denotes differentiation with respect to an auxiliary time  $\tau$  that is independent of  $t$ .

Note that assumption (A3) requires the linear unforced oscillatory system (9), posed formally for the dummy fast variable  $\eta$ , to be asymptotically stable. In this context,  $(x, \dot{x}, t)$  play the role of constant parameters ranging over  $\mathcal{D}_0$ . Assumption (A3) is satisfied, for instance, when  $A$  is symmetric, positive semi-definite and  $B$  is symmetric, positive definite over  $\mathcal{D}_0$ . In that case,  $A$  represents a damping matrix and  $B$  represents a stiffness matrix for all parameter values  $(x, \dot{x}, t) \in \mathcal{D}_0$ . At this point, (A3) is only a formal requirement with no immediately clear mathematical meaning. This is because the critical manifold  $\mathcal{M}_0(t)$  is not invariant under Eq. (6) and hence the arguments of  $A$  and  $B$  are, in fact, time-varying, and hence do not determine the stability of (9).

*Example 1 (Weakly nonlinear system with external forcing)* Consider a typical multi-degree-of-freedom mechanical system of the form

$$\begin{aligned} M_1 \ddot{x} + C_1 \dot{x} + K_1 x + S_1(x, y) &= f_1(t), \\ M_2 \ddot{y} + C_2 \dot{y} + K_2 y + S_2(x, y) &= f_2(t), \end{aligned} \quad (10)$$

with  $x \in \mathbb{R}^s$  and  $y \in \mathbb{R}^f$ . Here the  $M_i$  are symmetric and positive definite constant mass matrices;  $C_i$  are constant symmetric damping matrices;  $K_i$  are constant symmetric stiffness matrices; and the functions

$$S_i(x, y) = \mathcal{O}(|x|^2, |x||y|, |y|^2) \quad (11)$$

model nonlinear coupling terms. By definition (5), for an arbitrary scalar parameter  $\epsilon > 0$  independent of  $M_i, C_i, D_i$  and  $S_i$ , we specifically have

$$\begin{aligned} Q_1\left(x, \dot{x}, \frac{y}{\epsilon}, \dot{y}, t; \epsilon\right) &= -\left[C_1 \dot{x} + K_1 x + S_1\left(x, \epsilon \frac{y}{\epsilon}\right) - f_1(t)\right], \\ Q_2\left(x, \dot{x}, \frac{y}{\epsilon}, \dot{y}, t; \epsilon\right) &= -\left[C_2 \dot{y} + \epsilon K_2 \left(\frac{y}{\epsilon}\right) + S_2\left(x, \epsilon \frac{y}{\epsilon}\right) - f_2(t)\right]. \end{aligned}$$

Therefore, the functions

$$\begin{aligned} P_1(x, \dot{x}, \eta, \dot{y}, t; \epsilon) &= -M_1^{-1}[C_1 \dot{x} + K_1 x + S_1(x, \epsilon \eta) - f_1(t)], \\ P_2(x, \dot{x}, \eta, \dot{y}, t; \epsilon) &= -\epsilon M_2^{-1}[C_2 \dot{y} + \epsilon K_2 \eta + S_2(x, \epsilon \eta) - f_2(t)], \end{aligned}$$

are differentiable in  $\epsilon$  at the  $\epsilon = 0$  limit, satisfying assumption (A1). However, we have

$$P_2(x, \dot{x}, \eta, \dot{y}, t; 0) \equiv 0.$$

Therefore, while any function  $G_0(x, \dot{x}, t)$  satisfies (A2), both matrices  $A$  and  $B$  defined in (8) vanish, and hence assumption (A3) never holds for system (10). For this assumption to hold, some of the system parameters must be related to the small parameter  $\epsilon$ , as we shall see in the next two examples.

*Example 2 (Partially stiff weakly nonlinear system with very small stiff-inertia and parametric forcing)* Consider now the slightly modified multi-degree-of-freedom mechanical system

$$\begin{aligned} M_1 \ddot{x} + C_1 \dot{x} + K_1 x + S_1(x, y) &= f_1(t), \\ \epsilon^2 M_2 \ddot{y} + C_2 \dot{y} + \frac{1}{\epsilon} K_2 y + S_2(x, y) &= f_2(t), \end{aligned} \quad (12)$$

with a non-dimensional small parameter  $\epsilon \ll 1$ . All variables, matrices and functions are the same as in Example 1, but the  $y$ -component of this system generates very small inertial forces and also has large linear stiffness. This time, we have

$$\begin{aligned} P_1(x, \dot{x}, \eta, \dot{y}, t; \epsilon) &= -M_1^{-1}[C_1 \dot{x} + K_1 x + S_1(x, \epsilon \eta) - f_1(t)], \\ P_2(x, \dot{x}, \eta, \dot{y}, t; \epsilon) &= -\frac{1}{\epsilon} M_2^{-1}[C_2 \dot{y} + K_2 \eta + S_2(x, \epsilon \eta) - f_2(t)], \end{aligned}$$

therefore assumption (A1) is not satisfied, given that  $P_2$  is not differentiable at  $\epsilon = 0$ .

*Example 3 (Paradigm for targeted energy transfer: Weakly nonlinear system with small inertia in its essentially nonlinear component)* Consider the multi-degree-of-freedom mechanical system

$$\begin{aligned} M_1 \ddot{x} + C_1 \dot{x} + K_1 x + S_1(x, y) &= 0, \\ \epsilon M_2 \ddot{y} + C_2 \dot{y} + S_2(x, y) &= 0, \end{aligned} \quad (13)$$

with a non-dimensional small parameter  $\epsilon \ll 1$ . Again, all variables and matrices are the same as in Example

(1), but the  $y$ -component of (13) generates small inertial forces and no linear stiffness forces. This system is noted as a prototype example of targeted energy transfer (cf. Vakakis et al. [27]) from the  $x$  degrees of freedom to the  $y$  degrees of freedom. This energy transfer mechanism suggests the lack of a reduced-order model over the  $x$ -degrees of freedom, given that the  $y$ -variables display no long-term enslavement to the  $x$ -variables. Calculating the quantities in our assumption (A1), we find

$$P_1(x, \dot{x}, \eta, \dot{y}, t; \epsilon) = -M_1^{-1} [C_1 \dot{x} + K_1 x + S_1(x, \epsilon \eta)],$$

$$P_2(x, \dot{x}, \eta, \dot{y}, t; \epsilon) = -M_2^{-1} [C_2 \dot{y} + S_2(x, \epsilon \eta)],$$

are differentiable at  $\epsilon = 0$ , and hence assumption (A1) holds. However, the equation

$$Q_2(x, \dot{x}, \eta, 0, t; 0) = -S_2(x, 0) = 0$$

cannot be solved for the variable  $\eta$  at any point. As a consequence, even though a set of zero-acceleration states is defined by the equation  $S_2(x, 0) = 0$ , this set is not attracting. Indeed, the matrix  $B(x, v, t)$  defined in assumption (A3) vanishes identically and hence the linear system (9) is not asymptotically stable.

**Example 4 (Partially stiff weakly nonlinear system with parametric forcing)** Consider now the multi-degree-of-freedom mechanical system

$$M_1 \ddot{x} + C_1 \dot{x} + K_1 x + S_1\left(x, \frac{y}{\epsilon}\right) = f_1(t),$$

$$\epsilon M_2 \ddot{y} + C_2 \dot{y} + \frac{1}{\epsilon} K_2 y + S_2(x, y) = f_2(t), \quad (14)$$

with the same quantities as in Example (1). The difference here is that the mass matrix of the  $y$  degrees of freedom has small norm for  $\epsilon \ll 1$  and the stiffness matrix is large in norm in the same equation. In addition, the nonlinear coupling term in the  $x$ -equation is assumed to have a stiff dependence on  $y$ . In this case, we have

$$P_1(x, \dot{x}, \eta, \dot{y}, t; \epsilon)$$

$$= -M_1^{-1} [C_1 \dot{x} + K_1 x + S_1(x, \eta) - f_1(t)],$$

$$P_2(x, \dot{x}, \eta, \dot{y}, t; \epsilon)$$

$$= -M_2^{-1} [C_2 \dot{y} + K_2 \eta + S_2(x, \epsilon \eta) - f_2(t)],$$

which satisfy assumption (A1). Solving the equation  $Q_2(x, \dot{x}, \eta, 0, t; 0) = 0$  for  $\eta$ , we find that assumption (A2) is satisfied by the function

$$G_0(x, \dot{x}, t) = K_2^{-1} [f_2(t) - S_2(x, 0)],$$

$$(x, \dot{x}, t) \in \mathcal{D}_0 = \mathbb{R}^s \times \mathbb{R}^s \times \mathbb{R}, \quad (15)$$

provided that the stiffness matrix  $K_2$  is invertible. In that case, we obtain

$$A(x, \dot{x}, t) = M_2^{-1} C_2,$$

$$B(x, \dot{x}, t) = M_2^{-1} [K_2 + \epsilon \partial_y S_2(x, \epsilon G_0(x, \dot{x}, t))] \Big|_{\epsilon=0}$$

$$= M_2^{-1} K_2,$$

and hence the homogeneous linear oscillatory system in assumption (A3) becomes

$$\eta'' + M_2^{-1} C_2 \eta' + M_2^{-1} K_2 \eta = 0$$

or, equivalently,

$$M_2 \eta'' + C_2 \eta' + K_2 \eta = 0. \quad (16)$$

The zero equilibrium of this system is asymptotically stable by our assumptions on  $M_2$ ,  $C_2$  and  $K_2$ . Therefore, assumption (A3) is also satisfied for system (14).

### 3 Main result: global existence of an exact reduced-order model

To state our main result formally, we first define the following functions for all  $(x, \dot{x}, t) \in \mathcal{D}_0$ :

$$H_0(x, \dot{x}, t) = \partial_x G_0(x, \dot{x}, t) \dot{x} + \partial_{\dot{x}} G_0(x, \dot{x}, t)$$

$$\times P_1(x, \dot{x}, G_0(x, \dot{x}, t), 0, t; 0) + \partial_t G_0(x, \dot{x}, t),$$

$$G_1(x, \dot{x}, t) = -[D_\eta P_2(x, \dot{x}, G_0(x, \dot{x}, t), 0, t; 0)]^{-1}$$

$$\times D_{\dot{y}} P_2(x, \dot{x}, G_0(x, \dot{x}, t), 0, t; 0) H_0(x, \dot{x}, t)$$

$$- [D_\eta P_2(x, \dot{x}, G_0(x, \dot{x}, t), 0, t; 0)]^{-1}$$

$$\times D_\epsilon P_2(x, \dot{x}, G_0(x, \dot{x}, t), 0, t; 0),$$

$$H_1(x, \dot{x}, t) = \partial_x G_1(x, \dot{x}, t) v + \partial_{\dot{x}} G_1(x, \dot{x}, t)$$

$$\times P_1(x, \dot{x}, G_0(x, \dot{x}, t), 0, t; 0) + \partial_t G_1(x, \dot{x}, t). \quad (17)$$

With these quantities, we have the following result:

**Theorem 1** Under assumptions (A1)–(A3) and for  $\epsilon > 0$  small enough:

(i) The mechanical system (1) admits an exact reduced-order model satisfying the requirements (R1)–(R2).

(ii) The reduced-order model is given by

$$\ddot{x} - P_1(x, \dot{x}, G_0(x, \dot{x}, t), 0, t; 0)$$

$$= \epsilon \left[ D_\eta P_1(x, \dot{x}, G_0(x, \dot{x}, t), 0, t; 0) G_1(x, \dot{x}, t) \right.$$

$$+ D_{\dot{y}} P_1(x, \dot{x}, G_0(x, \dot{x}, t), 0, t; 0) H_0(x, \dot{x}, t)$$

$$+ D_\epsilon P_1(x, \dot{x}, G_0(x, \dot{x}, t), 0, t; 0) \Big]$$

$$+ \mathcal{O}(\epsilon^2) \quad (18)$$

for all  $(x, \dot{x}, t) \in \mathcal{D}_0$ .

- (iii) If  $M_1(x, \eta, \epsilon)$  is smooth in  $\epsilon$  at  $\epsilon = 0$ , then the multiplication of (18) by  $M_1$  gives a form of the reduced-order model that does not require the inversion of  $M_1$ :

$$M_1(x, G_0(x, \dot{x}, t), t; 0) \ddot{x} - Q_1(x, v, G_0(x, \dot{x}, t), 0, t; 0) = \mathcal{O}(\epsilon). \quad (19)$$

- (iv) Reduced-order models (18)–(19) describe the reduced flow on a  $2s$ -dimensional invariant manifold  $\mathcal{M}_\epsilon(t)$  along which positions and velocities in the stiff degrees of freedom are enslaved to those in the slow degrees of freedom via

$$\begin{aligned} y &= \epsilon G_0(x, \dot{x}, t) + \epsilon^2 G_1(x, \dot{x}, t) + \mathcal{O}(\epsilon^3), \\ \dot{y} &= \epsilon H_0(x, \dot{x}, t) + \epsilon^2 H_1(x, \dot{x}, t) + \mathcal{O}(\epsilon^3). \end{aligned} \quad (20)$$

- (v) The  $x(t)$  components of the trajectories of system (1) synchronize with appropriate model trajectories  $x_R(t)$  of (18) or (19) at an exponential rate. Specifically, let  $q(t) = (x(t), y(t))$  be a full trajectory of system (1) such that at a time  $t_0$ , the initial position  $q(t_0)$  is close enough to the slow manifold carrying the reduced-order model. Then there exists a trajectory  $x_R(t)$  of the reduced-order model (18) or (19) such that

$$\begin{aligned} & \left\| \begin{pmatrix} x(t) - x_R(t) \\ \dot{x}(t) - \dot{x}_R(t) \end{pmatrix} \right\| \\ & \leq C \left\| \begin{pmatrix} x(t_0) - x_R(t_0) \\ \dot{x}(t_0) - \dot{x}_R(t_0) \\ \frac{1}{\epsilon} y(t_0) - G_0(x_R(t_0), \dot{x}_R(t_0), t) + \mathcal{O}(\epsilon) \\ \dot{y}(t_0) - \epsilon H_0(x_R(t_0), \dot{x}_R(t_0), t) + \mathcal{O}(\epsilon^2) \end{pmatrix} \right\| e^{-\frac{\Lambda}{\epsilon}(t-t_0)}, \\ & t > t_0, \end{aligned} \quad (21)$$


where  $\Lambda > 0$  can be selected as any constant satisfying

$$\max_{j \in [1, f], (x, \dot{x}, t) \in \mathcal{D}_0} \operatorname{Re} \lambda_j(x, \dot{x}, t) < -\Lambda < 0,$$

with  $\lambda_j(x, \dot{x}, t)$ ,  $j = 1, \dots, f$ , denoting the eigenvalues of the associated linear system (75). The constant  $C > 0$  generally depends on the choice of  $\Lambda$  but is independent of the choice of the initial conditions  $q(t_0)$  and  $\dot{q}(t_0)$ .

*Proof* See “Appendix 1”.  $\square$

In Fig. 3, we illustrate the geometric relation between the reduced model flow on the slow manifold to general trajectories of the full system, as described by Theorem 1.

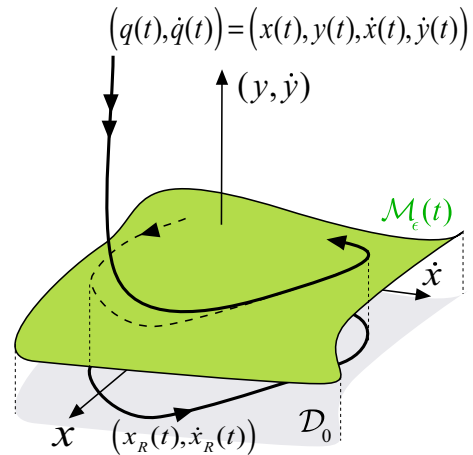

**Fig. 3** Reduced-order model trajectory  $(x_R(t), \dot{x}_R(t))$  as a projection from the slow manifold  $\mathcal{M}_\epsilon(t)$  to the space of the  $(x, \dot{x})$  variables. Other nearby trajectories converge to the slow manifold exponentially fast, and hence their projection on the  $(x, \dot{x})$  space synchronizes exponentially with trajectories of the reduced-order model

**Remark 2** If the left-hand side of reduced-order model (18) has structurally stable features (cf. Guckenheimer and Holmes [14]), then, for  $\epsilon > 0$  small enough, these features persist smoothly under the addition of the  $\mathcal{O}(\epsilon)$  terms of the right-hand side, and hence an explicit computation of these terms is not necessary. For instance, if system (18) has a single attracting fixed point or periodic orbit over the compact domain  $\mathcal{D}_0$ , then either of these features is robust without the explicit inclusion of the  $\mathcal{O}(\epsilon)$  and higher-order terms on its right-hand side. If, however, system (18) is conservative, then the inclusion of  $\mathcal{O}(\epsilon)$  terms is necessary to obtain a robust, dissipative reduced-order model. If the  $\mathcal{O}(\epsilon)$  terms are also conservative, then explicit evaluation of the  $\mathcal{O}(\epsilon^2)$  is required following the expansion scheme used in the proof of Theorem 1.

**Remark 3** The synchronization expressed by (21) means that both positions and velocities predicted by reduced-order model (18) are relevant for the observed system dynamics as long the time  $t > t_0$  is selected from the domain  $\mathcal{T}$ . This time-domain is unbounded (i.e.,  $\mathcal{T} = \mathbb{R}$ ) for mechanical systems with explicit periodic and quasiperiodic time dependence. For the case of temporally aperiodic time dependence, the times allowed in (21) are restricted to the finite interval  $\mathcal{T} = [a, b]$ .

$\mathcal{O}(\epsilon^2)$  is required following the expansion scheme used in the proof of Theorem 1.



**Example 5 (Partially stiff weakly nonlinear system with parametric forcing)** We recall that the partially stiff system (14) in Example 4 satisfies assumptions (A1)–(A3) and hence admits an exact, global reduced-order model. The form of the function  $G_0$  from (15) is

$$G_0(x, \dot{x}, t) = K_2^{-1} [f_2(t) - S_2(x, 0)]. \quad (22)$$

The mass matrix  $M_1$  is independent of  $\epsilon$ , and hence equivalent form (19) of the reduced-order model applies and gives

$$\begin{aligned} M_1 \ddot{x} + C_1 \dot{x} + K_1 x + S_1 \left( x, K_2^{-1} [f_2(t) - S_2(x, 0)] \right) \\ = f_1(t) + O(\epsilon). \end{aligned}$$

The leading-order terms in expressions (20) for the slow manifold are

$$\begin{aligned} y &= \epsilon G_0(x, \dot{x}, t) + O(\epsilon^2) \\ &= \epsilon K_2^{-1} [f_2(t) - S_2(x, 0)] + O(\epsilon^2), \\ \dot{y} &= \epsilon H_0(x, \dot{x}, t) + O(\epsilon^2) \\ &= \epsilon K_2^{-1} [\dot{f}_2(t) - \partial_x S_2(x, 0) \dot{x}] + O(\epsilon^2). \end{aligned}$$

If  $f(t)$  is periodic or quasiperiodic in time, then we have the synchronization estimate (21) for all times  $t > t_0$ . Specifically, any  $\Lambda > 0$  can be selected such that  $-\Lambda < 0$  is a strict upper bound on the real part of the spectrum of the oscillatory system (16). We note that if we had assumed a non-stiff coupling of the form  $S_1(x, y)$  in Example 4, then assumptions (A1)–(A4) would still have been satisfied, but the reduced model would simplify to

$$M_1 \ddot{x} + C_1 \dot{x} + K_1 x + S_1(x, 0) = f_1(t) + O(\epsilon),$$

uncoupling completely from the stiff modes at leading order. Convergence estimate (21) would remain valid in this case, too.

#### 4 The boundary of the domain of model reduction

In the examples we have discussed so far, the domain  $\mathcal{D}_0$  could be selected arbitrarily large. Thus, a reduced-order model exists over arbitrarily large  $(x, \dot{x}, t)$  values in these problems, as long as  $\epsilon$  is kept small enough. In general, however,  $\mathcal{D}_0$  will have a nonempty boundary  $\partial \mathcal{D}_0$  over which reduced-order model (18)–(19) cannot be further extended.

Such non-extendibility of the reduced-order model domain arises from a break-down in the solvability of

algebraic equation (7) for the critical manifold. By the implicit function theorem, this occurs along points satisfying

$$\begin{aligned} \det [\partial_\eta P_2(x, \dot{x}, G_0(x, \dot{x}, t), 0, t; 0)] &= 0, \\ (x, \dot{x}, t) &\in \partial \mathcal{D}_0. \end{aligned} \quad (23)$$

In the generic case, this determinant becomes zero at points where  $\partial_\eta P_2$  has a single zero eigenvalue, i.e.,

$$\begin{aligned} \text{rank} [\partial_\eta P_2(x, \dot{x}, G_0(x, \dot{x}, t), 0, t; 0)] &= f - 1, \\ (x, \dot{x}, t) &\in \partial \mathcal{D}_0. \end{aligned} \quad (24)$$

Under further nondegeneracy conditions (see., e.g., Arnold [2]), a fold develops in the critical manifold along  $\partial \mathcal{D}_0$ , i.e.,  $\mathcal{M}_0 \equiv \mathcal{M}_0^+$  ceases to be a locally unique graph over the  $(x, \dot{x}, t)$  variables. As we pass from  $\mathcal{M}_0$  to the newly bifurcating critical manifold branch  $\mathcal{M}_0^-$ , the matrices  $A(x, \dot{x}, t)$  and  $B(x, \dot{x}, t)$  vary smoothly in their arguments, given that one manifold branch is smoothly connected to the other one along a fold. Under nondegeneracy condition (24), precisely one eigenvalue of the matrix  $B(x, \dot{x}, t)$  will cross zero in the passage from  $\mathcal{M}_0^+$  to  $\mathcal{M}_0^-$  along the critical manifold. In this case, the graph segment  $\eta = G_0^-(x, \dot{x}, t)$  describing the bifurcating branch  $\mathcal{M}_0^-$  (9) violates assumption (A2). As a consequence, the folded slow manifold branch  $\mathcal{M}_\epsilon^-$  perturbing from  $\mathcal{M}_0^-$  is unstable and hence irrelevant for reduced-order modeling.

In summary, unlike in the setting of the local construction of spectral submanifolds near equilibria (cf. Haller and Ponsioen [15]), a folding invariant manifold arising in SFD is not a technical limitation to overcome when one is in pursuit of a more global reduced-order model. Rather, a fold in the slow manifold over the plane of slow variables signals precisely the limit beyond which no reduced-order model satisfying (R1)–(R2) exists in a given part of the phase space.

**Example 6 (Partially stiff weakly nonlinear system with parametric forcing)** Consider now the multi-degree-of-freedom mechanical system

$$\begin{aligned} M_1 \ddot{x} + C_1 \dot{x} + K_1 x + S_1 \left( x, \frac{y}{\epsilon} \right) &= f_1(t), \\ \epsilon M_2 \ddot{y} + C_2 \dot{y} + \frac{1}{\epsilon} K_2 y + S_2 \left( x, \frac{y}{\epsilon} \right) &= f_2(t), \end{aligned} \quad (25)$$

with the same variables, matrices and functions used in Example 4, except that here the coupling function  $S_2$  also has a stiff dependence on the  $y$  variables. We then obtain

$$\begin{aligned}
P_1(x, \dot{x}, \eta, \dot{\eta}, t; \epsilon) \\
&= -M_1^{-1} [C_1 \dot{x} + K_1 x + S_1(x, \eta) - f_1(t)], \\
P_2(x, \dot{x}, \eta, \dot{\eta}, t; \epsilon) \\
&= -M_2^{-1} [C_2 \dot{\eta} + K_2 \eta + S_2(x, \eta) - f_2(t)].
\end{aligned}$$

Thus, assumption (A1) is satisfied again. Condition (23) in this case gives

$$\det [M_2^{-1} (K_2 + \partial_y S_2(x, \eta))] \neq 0.$$

By the non-singularity of  $M_2$ , this latter condition is equivalent to

$$\det [K_2 + \partial_y S_2(x, \eta)] \neq 0.$$

For instance, when  $S_2$  has only quadratic terms, then this last condition can always be written as

$$\det [K_2 + \Pi x + \Phi \eta] \neq 0, \quad (26)$$

where  $\Pi$  and  $\Phi$  are 3-tensors of appropriate dimensions. Suppose now, for simplicity, that  $\Phi \equiv 0$ , the master variable  $x$  is a scalar ( $m = 1$ ), and  $\Pi \in \mathbb{R}^{f \times f}$  is nonsingular. Requirement (26) then becomes

$$\det [\Pi^{-1} K_2 - (-x)I] \neq 0, \quad (27)$$

which implies that  $-x$  cannot be an eigenvalue of  $\Pi^{-1} K_2$ . Consequently, condition (27) fails along the domain boundary

$$\begin{aligned}
\partial \mathcal{D}_0 = \left\{ (x, \dot{x}, t) : \exists j : x = -\lambda_j (\Pi(x, \dot{x}, t) : \exists j : \right. \\
\left. x = -\lambda_j (\Pi^{-1} K_2) \right\},
\end{aligned}$$

with  $\lambda_j (\Pi^{-1} K_2)$  denoting the  $j$ th real eigenvalue of the matrix  $\Pi^{-1} K_2$ .

To illustrate the geometry of the critical manifold in a simple case, we let  $s = f = 1$  and select the parameters, the coupling and the forcing terms as

$$K_2 = 4, \quad S_2(x, \eta) = x^2 + 4\eta^2, \quad f_2(t) = \sin t,$$

so that the equation  $P_2(x, \dot{x}, \eta, 0, t; 0) = 0$  takes the form

$$4\eta + x^2 + 4\eta^2 - \sin t = 0. \quad (28)$$

This equation is solved by  $\eta = x = t = 0$  and hence the set  $\mathcal{D}_0$  is nonempty. The boundary  $\partial \mathcal{D}_0$ , defined by conditions (23)–(24), satisfies

$$\begin{aligned}
\det [\partial_\eta P_2(x, \dot{x}, \eta, 0, t; 0)] &= \partial_\eta P_2(x, \dot{x}, \eta, 0, t; 0) \\
&= 4 + 8\eta = 0 \iff \eta = -\frac{1}{2},
\end{aligned}$$

$$\partial_\eta \det \left[ \partial_\eta P_2 \left( x, \dot{x}, -\frac{1}{2}, 0, t; 0 \right) \right] = 8 \neq 0,$$

where the second condition here is the classic non-degeneracy condition for fold bifurcations in the one-dimensional case (cf. Arnold [2]). Substitution of  $\eta = -\frac{1}{2}$  into Eq. (28) gives an explicit definition for  $\partial \mathcal{D}_0$  in the  $(x, \dot{x}, t)$  space as

$$\partial \mathcal{D}_0 = \left\{ (x, \dot{x}, t) : x^2 = 1 + \sin t \right\}. \quad (29)$$

A direct solution of Eq. (28) through the quadratic formula confirms that the zero set

$$\eta = G_0^\pm(x, \dot{x}, t) = \frac{-1 \pm \sqrt{1 - (x^2 - \sin t)}}{2},$$

$$(x, \dot{x}, t) \in \mathcal{D}_0 = \left\{ (x, \dot{x}, t) : x^2 < 1 + \sin t \right\}$$

indeed ceases to be a graph and develops a fold singularity along  $\partial \mathcal{D}_0$ . The stability of the two branches of  $G_0^\pm(x, \dot{x}, t)$  can be determined by calculating (9) along both branches:

$$\begin{aligned}
A^\pm(x, \dot{x}, t) &= M_2^{-1} C_2, \\
B^\pm(x, \dot{x}, t) &= -M_2^{-1} (4 + 8G_0^\pm(x, \dot{x}, t)) \\
&= \mp 4\sqrt{1 - (x^2 - \sin t)}.
\end{aligned}$$

Therefore, the critical manifold

$$\mathcal{M}_0^+ = \left\{ (x, \dot{x}, t) \in \mathcal{D}_0 : \eta = G_0^+(x, \dot{x}, t) \right\}$$

satisfies assumptions (A1)–(A3) but develops a fold over  $\mathcal{D}_0$  along the boundary curve  $\partial \mathcal{D}_0$  defined in (29). The additional branch

$$\mathcal{M}_0^- = \left\{ (x, \dot{x}, t) \in \mathcal{D}_0 : \eta = G_0^-(x, \dot{x}, t) \right\}$$

emanating from the domain boundary  $\partial \mathcal{D}_0$  is unstable, as its associated constant-coefficient linear system (cf. assumption (A2)), given by


$$M_2 u'' + C_2 u' - 4\sqrt{1 - (x^2 - \sin t)} u = 0,$$

is unstable. We show the stable and unstable critical manifolds, as well as the domain boundary  $\partial \mathcal{D}_0$ , in Fig. 4.

## 5 Approximate SFD near equilibria: Static condensation and modal derivatives

Here we show that at least two formal reduction procedures used in structural dynamics, modal condensation and the method of modal derivatives, can be mathematically justified when the conditions (A1)–(A3) of the SFD are satisfied. In this case, these two procedures turn out to provide local first- and second-order

**Fig. 4** The stable critical manifold branch  $\mathcal{M}_0^+$  and the unstable branch  $\mathcal{M}_0^-$  for nonlinear mechanical system (25) with  $s = f = 1$ . Also shown is the domain boundary  $\partial\mathcal{D}_0$  along which the fold in the critical manifold  $\mathcal{M}_0$  develops

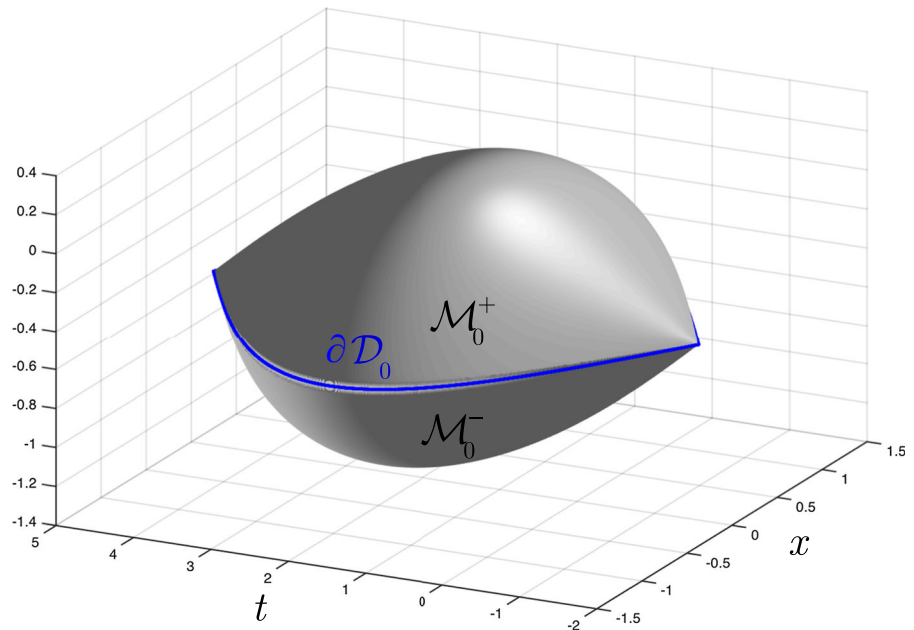

approximations, respectively, to a slow manifold  $\mathcal{M}_\epsilon$  emanating from an equilibrium point of the unforced mechanical system.

To show this, we also assume the following:

**(A4) Independence of critical manifold of the slow velocities:** The relation

$$\partial_{\dot{x}} Q_2(x, \dot{x}, \eta, 0, t; 0) \equiv 0, \quad (30)$$

holds, i.e., the function  $P_2$  has not explicit dependence on the slow velocities  $\dot{x}$  for  $\epsilon = 0$  and  $\dot{y} = 0$ .


We further assume that the domain  $\mathcal{D}_0$ , over which the graph  $\eta = G_0(x, \dot{x}, t)$  is defined, contains the line  $x = 0$  of the  $(x, \dot{x}, t)$  parameter space, i.e.,

**(A5) Critical manifold contains an unforced fixed point:** We assume

$$\{(x, \dot{x}, t) : x = 0, \dot{x} = 0\} \subset \mathcal{D}_0. \quad (31)$$

This condition is satisfied, for instance, when (1) is a weakly nonlinear system whose unforced part admits a fixed point at  $q = (x, y) = 0$ . The implications of assumptions (A4)–(A5) for the geometry of the critical manifold are illustrated in Fig. 5.

Static condensation (Geradin and Rixen [13]) is a linear reduction procedure applied to a  $q = (x, y)$  partition of the degrees of freedom in system (1) near an equilibrium point. In this reduction method, the inertial terms and velocities are simply ignored in the linearized

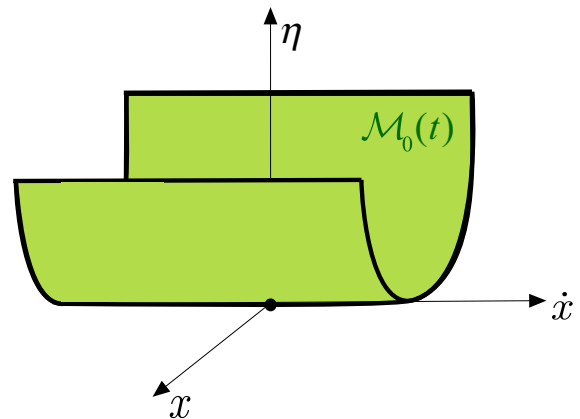

**Fig. 5** The geometry of the critical manifold  $\mathcal{M}_0(t)$  under assumptions (A3)–(A4) at an arbitrary time  $t$

equation for the  $y$  degrees of freedom. The resulting linear algebraic equation is solved for  $y$ , and the result is substituted for  $y$  in the  $x$  equations, yielding a single second-order differential equation in the  $x$  variables.

The method of modal derivatives (Idelsohn and Cardona [16], Rutzmoser et al. [24], Wu and Tiso [28]) considers a similar  $q = (x, y)$  partition of coordinates near an unforced equilibrium and seeks a quadratic invariant manifold tangent to an eigenspace of the linearized system. The main assumption is that along this quadratic manifold, the  $y$  coordinates can be written as purely quadratic functions of the  $x$  coordinates, with the coef-

ficients of these quadratic forms collected in an appropriate *modal derivative tensor*.

The above two reduction methods can be justified in our present setting as follows:

**Proposition 1** *Under assumptions (A1)–(A5):*

- (i) *The expressions derived for the slow manifold  $\mathcal{M}_\epsilon(t)$  in (20) satisfy*

$$G_0(x, \dot{x}, t) = \Gamma(t) + \Phi(t)x + (\Theta(t)x)x + \mathcal{O}(|x|^3), \quad (32)$$

*where the function  $\Gamma(t)$  is the solution of the equation  $P_2(0, \Gamma(t), 0, t; 0) = 0$ , and the two-tensor  $\Phi(t)$  and the three-tensor  $\Theta(t)$  satisfy*

$$\begin{aligned} \Phi(t) &= -[\partial_\eta P_2]^{-1} \partial_x P_2 \Big|_{x=0, \eta=\Gamma(t), \dot{y}=0, \epsilon=0}, \\ \Theta(t) &= -\frac{1}{2} [\partial_\eta P_2]^{-1} \left[ \partial_{xx}^2 P_2 + \left( 2\partial_{x\eta}^2 P_2 + \partial_{\eta\eta}^2 P_2 \Phi(t) \right) \Phi(t) \right] \Big|_{x=0, \eta=\Gamma(t), \dot{y}=0, \epsilon=0}. \end{aligned} \quad (33)$$

- (ii) *Assume that  $P_2(x, \dot{x}, \eta, 0, t; 0)$  has no explicit time dependence and  $(x, y)$  are modal coordinates for the linearized system at  $(x, y) = 0$ , i.e.,*

$$\begin{aligned} \partial_t P_2(x, \dot{x}, \eta, 0, t; 0) &\equiv 0, \\ \partial_x P_2(0, 0, 0, 0, t; 0) &= 0, \\ \partial_\eta P_1(0, 0, 0, 0, t; 0) &= 0. \end{aligned}$$

*We then obtain*

$$\begin{aligned} \Gamma &= 0, \quad \Phi = 0, \\ \Theta &= -\frac{1}{2} [\partial_\eta P_2(0, 0, 0, 0, t; 0)]^{-1} \\ &\quad \times \partial_{xx}^2 P_2(0, 0, 0, 0, t; 0). \end{aligned} \quad (34)$$

- (iii) *Under the conditions of statement (ii), a linear-in- $x$  and zeroth-order-in- $\epsilon$  approximation to  $\mathcal{M}_\epsilon(t)$  yields the modal-condensation-based reduced model*

$$\ddot{x} - P_1(x, \dot{x}, 0, 0, t; 0) + \mathcal{O}(\epsilon, |x|^3) = 0 \quad (35)$$

*for the dynamics on  $\mathcal{M}_\epsilon(t)$*

- (iv) *Under the conditions of statement (ii), a quadratic-in- $x$  and zeroth-order-in- $\epsilon$  approximation to  $\mathcal{M}_\epsilon(t)$  yields the modal-derivative-based reduced-order model*

$$\ddot{x} - P_1(x, \dot{x}, (\Theta(t)x)x, 0, t; 0) + \mathcal{O}(\epsilon, |x|^4) = 0 \quad (36)$$

*for the dynamics on  $\mathcal{M}_\epsilon(t)$ , with  $\Theta(t)$  generally referred to as the modal derivative tensor.*

*Proof* See “Appendix 2”.  $\square$

**Remark 4** Combining statement (iii) of Theorem 1 with Proposition 1 gives that if  $M_1(x, \eta, \epsilon)$  is smooth in  $\epsilon$  at  $\epsilon = 0$ , then the static-condensation-based model (35) is equivalent to

$$M_1(x, 0; 0) \ddot{x} - Q_1(x, \dot{x}, 0, 0, t; 0) + \mathcal{O}(\epsilon, |x|^3) = 0, \quad (37)$$

and the modal-derivatives-based reduced model (36) is equivalent to

$$M_1(x, (\Theta x)x; 0) \ddot{x} - Q_1(x, \dot{x}, (\Theta x)x, 0, t; 0) + \mathcal{O}(\epsilon, |x|^4) = 0. \quad (38)$$

**Remark 5** The unevaluated higher-order  $\mathcal{O}(|x|^3)$  and  $\mathcal{O}(|x|^4)$  terms in Eqs. (37) and (38) generally do not remain uniformly small over the full model reduction domain  $\mathcal{D}_0$ . Rather, one can only use the leading-order model terms in these equations reliably as long as the slow coordinates are rescaled as  $x = \sqrt[3]{\epsilon} \xi$  and  $x = \sqrt[4]{\epsilon} \xi$ , respectively. In that case, (37) and (38) can be re-written as

$$M_1(\xi, 0; 0) \ddot{\xi} - Q_1(\xi, \dot{\xi}, 0, 0, t; 0) + \mathcal{O}(\epsilon) = 0, \quad (39)$$

$$M_1(\xi, (\Theta \xi) \xi; 0) \ddot{\xi} - Q_1(\xi, \dot{\xi}, (\Theta \xi) \xi, 0, t; 0) + \mathcal{O}(\epsilon) = 0, \quad (40)$$

respectively. One can then arguably focus on the  $\epsilon$ -independent leading-order terms for  $\epsilon > 0$  small enough. The static-condensation- and model-derivative-based reductions are, therefore, justified in order  $\mathcal{O}(\sqrt[3]{\epsilon})$  and  $\mathcal{O}(\sqrt[4]{\epsilon})$  neighborhoods of the  $x = 0$  equilibrium, respectively, provided that the assumptions of Proposition 1 are satisfied.

**Example 7** (*Localized reduced-order model for a stiff, weakly nonlinear system with parametric forcing*) We now reconsider the multi-degree-of-freedom mechanical system (14) and assume that

$$f_2(t) \equiv 0, \quad (41)$$

i.e., that the external forcing on the stiff degrees of freedom vanishes. Using the results from Example 6, we have

$$\begin{aligned} P_1(x, \dot{x}, \eta, \dot{y}, t; \epsilon) &= -M_1^{-1} [C_1 \dot{x} + K_1 x + S_1(x, \eta) - f_1(t)], \\ P_2(x, \dot{x}, \eta, \dot{y}, t; \epsilon) &= -M_2^{-1} [C_2 \dot{y} + K_2 \eta + S_2(x, \eta)]. \end{aligned}$$

As already discussed in Example 6, conditions (A1)–(A3) are satisfied and hence Theorem 1 guarantees a

slow manifold and determines its reduced dynamics. Assumption (30) is clearly satisfied, as  $P_2$  does not depend on  $\dot{x}$ . Assumption (31) also holds, as one sees from the expression for  $G_0$  in (22). Since  $P_2$  has no explicit time dependence, the static condensation and modal derivative formulas in (83) apply and take the specific form

$$\begin{aligned} \Gamma &\equiv 0, & \Phi &\equiv 0, \\ \Theta &= -\left[-M_2^{-1}K_2\right]^{-1}\left[-M_2^{-1}\partial_{xx}^2S_2(0,0)\right] \\ &= -K_2^{-1}\partial_{xx}^2S_2(0,0). \end{aligned} \quad (42)$$

Therefore, in a neighborhood of the origin, the reduced-order formulation (39) applies and statement (iii) of Proposition 1 justifies the static-condensation-based reduced model

$$M_1\ddot{\xi} + C_1\dot{\xi} + K_1\xi + S_1(x, 0) - f_1(t) + \mathcal{O}(\epsilon) = 0$$

as a leading-order reduced model for the dynamics on  $\mathcal{M}_\epsilon(t)$  in an order  $\mathcal{O}(\sqrt[3]{\epsilon})$  neighborhood of the unforced equilibrium  $x = 0$ . Similarly, statement (iv) of Proposition (1) justifies the modal-derivative-based reduced-order model

$$\begin{aligned} M_1\ddot{\xi} + C_1\dot{\xi} + K_1\xi + S_1\left(x, -\left[K_2^{-1}\partial_{xx}^2S_2(0,0)x\right]x\right) \\ - f_1(t) + \mathcal{O}(\epsilon) = 0 \end{aligned} \quad (43)$$

in an order  $\mathcal{O}(\sqrt[4]{\epsilon})$  neighborhood of the unforced equilibrium  $x = 0$ .

The above example illustrates how Proposition 1 puts static condensation and modal derivatives in a rigorous context under appropriate assumptions. We now also illustrate, however, that these two intuitive reduction methods give incorrect results when the assumptions of Proposition 1 are not satisfied.

**Example 8 (Failure of static modal condensation and model-derivative-based reduction)** Consider a two-degree-of-freedom nonlinear, coupled oscillator system with amplitude-dependent damping in the first mode, given by the equations

$$\begin{aligned} \ddot{x} + \left(c_1 + \mu_1 x^2\right)\dot{x} + k_1x + axy + bx^3 &= 0, \quad x \in \mathbb{R}, \\ \ddot{y} + c_2\dot{y} + k_2y + cx^2 &= 0, \quad y \in \mathbb{R}. \end{aligned} \quad (44)$$

Note that the linearized system at the  $(x, y) = (0, 0)$  equilibrium is in modal coordinates. For  $c_2 > c_1$ , we obtain slower linear amplitude decay in the two-dimensional modal subspace of the  $x$  variable than in the modal subspace of the  $y$  variable. This suggests a reduction to a model involving only the slower  $x$  variables. The argument used in Example 1, however, shows that (44) violates assumption (A3) and hence Proposition 1 does not apply. The static condensation procedure, nevertheless, gives the formal reduced-order model

$$\ddot{x} + \left(c_1 + \mu_1 x^2\right)\dot{x} + k_1x + bx^3 = 0, \quad (45)$$

and the method of modal derivatives formally gives the formal reduced model

$$\ddot{x} + \left(c_1 + \mu_1 x^2\right)\dot{x} + k_1x + \left(b - \frac{ac}{k_2}\right)x^3 = 0, \quad (46)$$

modifying (45) at cubic order only. While a global slow manifold is not guaranteed to exist in this example, a unique, two-dimensional analytic invariant manifold tangent to the subspace of the  $x$  variables at the origin does exist (cf. Haller and Ponsioen [15]). This spectral submanifold (SSM) offers a mathematically rigorous process for model reduction in system (44), providing an exact reduced flow to which (45) and (46) can be compared. As we show in “Appendix 3”, the reduced model on the slow SSM is of the form

$$\begin{aligned} \ddot{x} + \left[ c_1 + \left( \mu_1 - \frac{2ac(4c_1k_1 + k_2(c_1 - c_2) + 2c_1c_2^2 - 6c_1^2c_2 + 4c_1^3)}{D} \right) x^2 \right] \dot{x} \\ + \left[ k_1 - \frac{2ac(2c_1^2 - 3c_1c_2 + c_2^2 + 4k_1 - k_2)}{D} \right] x^2 \\ + \left[ b - \frac{ac(4c_1^4 - 6c_1^3c_2 + 2c_1^2c_2^2 + 5c_1^2k_2 - c_1c_2(2k_1 + 3k_2) + 2c_2^2k_1 + 8k_1^2 - 6k_1k_2 + k_2^2)}{D} \right] x^3 \\ + \mathcal{O}(4) = 0, \end{aligned} \quad (47)$$



where

$$D = \left( c_1^2 - c_1 c_2 + k_2 \right) \left( 4c_1^2 k_2 - 8c_1 c_2 k_1 - 2c_1 c_2 k_2 + 4c_2^2 k_1 + 16k_1^2 - 8k_1 k_2 + k_2^2 \right). \quad (48)$$

A comparison of the exact reduced model (47) with the statically condensed version (45) and with the modal-derivatives-based version (46) shows that the latter two heuristic reduction methods miss most terms already in the leading-order (cubic) nonlinearities. Depending on the specific value of the parameters, the missing terms can significantly impact the nature of the reduced dynamics and hence cannot be omitted. We conclude that neither the Guyan reduction nor the method of modal derivatives gives correct result in this general case. Consider, however, now the parameter range expressed by the scaling

$$c_2 \rightarrow c_2/\epsilon, \quad k_2 \rightarrow k_2/\epsilon^2, \quad (49)$$

i.e., the case when the  $y$ -degree of freedom is notably stiffer and stronger damped as the  $x$ -degree of freedom in system (44). In this parameter domain, system (44) satisfies the assumptions of Proposition 1 and hence the approximation to the slow SSM should coincide with the approximation to the global slow manifold  $\mathcal{M}_\epsilon$  in this case. Indeed, after the above scaling, formulas (89) for the constants  $\alpha$ ,  $\beta$  and  $\gamma$  in “Appendix 3” simplify to

$$\alpha = -\frac{c}{k_2}\epsilon^2 + \mathcal{O}(\epsilon^3), \quad \beta = \mathcal{O}(\epsilon^3), \quad \gamma = \mathcal{O}(\epsilon^3),$$

and hence the exact reduced model (47) simplifies to

$$\ddot{x} + \left( c_1 + \mu_1 x^2 \right) \dot{x} + k_1 x + \left( b - \frac{ac}{k_2/\epsilon^2} \right) x^3 + \mathcal{O}(\epsilon^3) = 0, \quad (50)$$

coinciding with the modal-derivatives-based reduced-order model (46). This agreement, however, only holds in slow-fast scaling (49).

Even in the conservative limit, when the SSM is replaced by a unique, analytic Lyapunov-subcenter manifold (Kelley [19]), we obtain a conservative limit of the exact reduced-order model (47) in the form

$$\ddot{x} + \left[ k_1 - \frac{2ac}{k_2(4k_1 - k_2)} \dot{x}^2 \right] x + \left[ b - \frac{ac(2k_1 - k_2)}{k_2(4k_1 - k_2)} \right] x^3 + \mathcal{O}(x^4) = 0, \quad (51)$$

filled with nonlinear normal modes (periodic orbits). At the same time, the conservative limit of the static condensation procedure gives

$$\ddot{x} + k_1 x + b x^3 = 0, \quad (52)$$

while the modal derivatives-based reduction (46) gives

$$\ddot{x} + k_1 x + \left( b - \frac{ac}{k_2} \right) x^3 + \mathcal{O}(x^4) = 0. \quad (53)$$

Comparing (51) and (53) shows that the method of modal derivatives gives an incorrect reduced-order model up to cubic order, unless we have either  $a = 0$  or  $c = 0$ . As shown in Fig. 6, error between the actual reduced flow (51) and (53) grows unbounded in the vicinity of the 2:1 resonance (represented by  $k_2 = 4k_1$ ) between the two natural frequencies of the undamped limit of system (44). In the limit of an exact 2 : 1 resonance, no invariant manifold tangent to the  $x$ -subspace exists, even though the modal derivative approach still suggests the existence a bounded reduced flow on such a manifold.


## 6 A detailed example: three-degree-of-freedom system with a pendulum damper

We consider a the system depicted in Fig. 7, with a mass  $M$  hanging on a vertical spring of unstretched length  $L$  and linear viscous damping  $C_h$ . The spring is hardening, with linear stiffness coefficient  $K_h$  and cubic stiffness coefficient  $\Gamma_h > 0$ . The mass is subject to downward external periodic forcing of the form  $f_h(t) = f_{h0} \sin \omega_1 t$ , as well as to gravity whose constant is  $g$ . The downward position of the mass from the unstretched spring position is measured by the coordinate  $h$ . The horizontal spring with linear stiffness coefficient  $K_d$  and natural length  $D$  is fixed to the surroundings, thereby introducing geometric nonlinearities. Added in this direction is a viscous damper with damping coefficient  $C_d$  and an external periodic force  $f_d(t) = f_{d0} \sin \omega_1 t$ , both acting in the horizontal direction.

As indicated in Fig. 7, a pendulum of mass  $m$  and length  $l$  is attached to the mass  $M$ . The angle of the pendulum from the vertical is denoted by  $\gamma$ . The pendulum is also subject to angular viscous damping with coefficient  $c_p$ , and to an external periodic force  $f_p(t) = f_{p0} \sin \omega_2 t$  acting on  $m$  in a direction normal to the pendulum.


The equations of motion for this system are

$$ml^2 \ddot{\gamma} - ml \sin \gamma \ddot{h} + ml \cos \gamma \dot{h} + c_p \dot{\gamma} + mgl \sin \gamma = f_p(t)l,$$

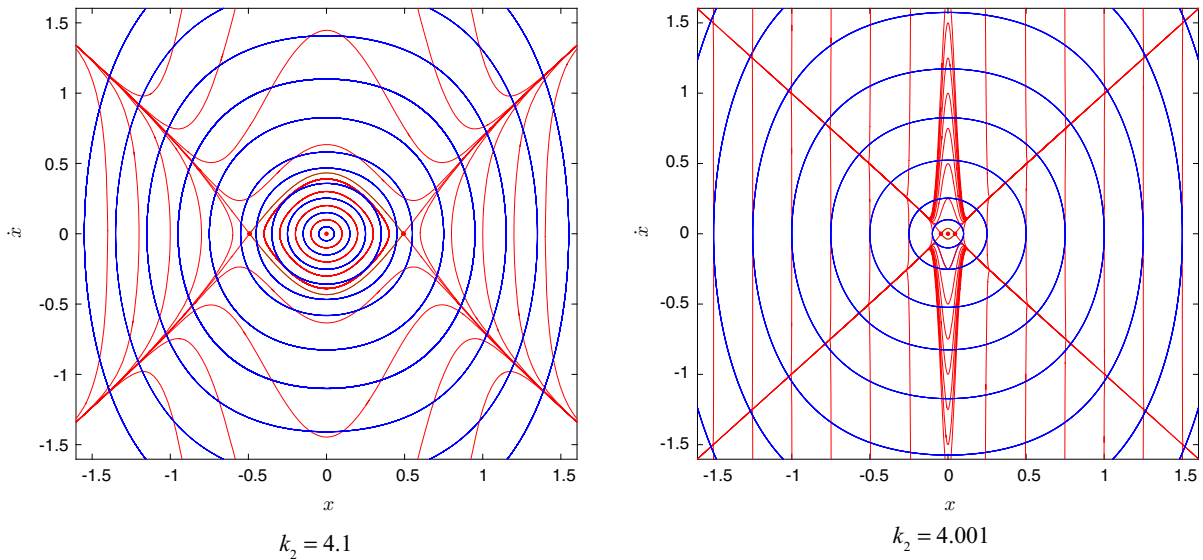

**Fig. 6** Trajectories of cubic modal-derivative-based reduction (53) (blue) and those of exact cubic reduction (51) (red) to the unique, 2D analytic invariant manifold over the  $(x, \dot{x})$  variables.

The remaining parameters are set as  $k_1 = a = b = c = 1$ . (Color figure online)

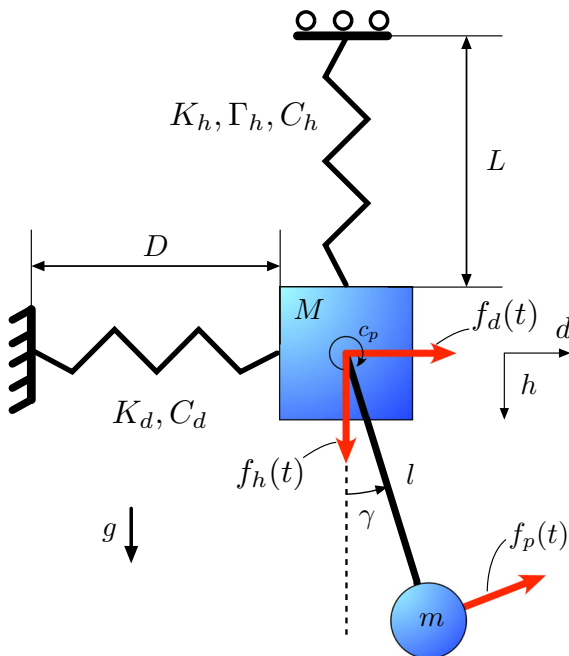

**Fig. 7** Three-degree-of-freedom coupled pendulum

$$(M + m)\ddot{h} - ml \sin \gamma \ddot{\gamma} - ml \cos \gamma \dot{\gamma}^2 + C_h \dot{h} + K_h h + K_d Q(d, h)h + \Gamma_h h^3 = (M + m)g + f_h(t) - f_p(t) \sin \gamma,$$

$$(M + m)\ddot{d} + ml \cos \gamma \ddot{\gamma} - ml \sin \gamma \dot{\gamma}^2 + C_d \dot{d} + K_d (D + d) Q(d, h) = f_d(t) + f_p(t) \cos \gamma, \quad (54)$$

with the geometric nonlinear term  $Q(d, h)$

$$Q(d, h) = \left( 1 - \frac{D}{\sqrt{(D + d)^2 + h^2}} \right).$$

The linearized oscillation frequencies of the uncoupled springs and of the pendulum are

$$\omega_h = \sqrt{\frac{K_h}{M}}, \quad \omega_d = \sqrt{\frac{K_d}{M}}, \quad \omega_p = \sqrt{\frac{g}{l}}, \quad (55)$$

respectively. With the help of these frequencies, we non-dimensionalize the  $h$  and  $d$  coordinates, the time  $t$ , and all system parameters by letting

$$\tilde{h} = \frac{h}{L}, \quad \tilde{d} = \frac{d}{D}, \quad \tilde{t} = \omega_p t,$$

$$\Delta = \frac{l}{L}, \quad \rho = \frac{D}{L}, \quad \beta = \frac{m}{M}, \quad F_h(t) = \frac{f_h(t)}{Mg},$$

$$F_p(t) = \frac{f_p(t)}{Mg}, \quad F_d(t) = \frac{f_d(t)}{Mg}, \quad G_p(t) = \frac{f_p(t)}{mg},$$

$$\pi_h = \frac{C_h}{\omega_p M}, \quad \pi_d = \frac{C_d}{\omega_p M}, \quad \pi_p = \frac{c_p}{\omega_p m L^2},$$

$$q_h = \frac{\omega_h^2}{\omega_p^2}, \quad q_d = \frac{\omega_d^2}{\omega_p^2}, \quad a_h = \frac{\Gamma_h L^2}{M \omega_p^2},$$

which leads to the following definition for the scaled version of  $Q(d, h)$

$$\tilde{Q}(\tilde{d}, \tilde{h}) = \left( 1 - \frac{\rho}{\sqrt{\rho^2 (1 + \tilde{d})^2 + \tilde{h}^2}} \right).$$

Denoting differentiation with respect to the new time  $\tilde{t}$  still by a dot, then dropping all the tildes, we obtain the non-dimensionalized equations of motions

$$\begin{aligned} \Delta^2 \ddot{\gamma} - \Delta \sin \gamma \ddot{h} + \rho \Delta \cos \gamma \ddot{d} + \pi_p \dot{\gamma} + \Delta^2 \sin \gamma \\ = \Delta^2 G_p(t), \\ (1 + \beta) \ddot{h} - \beta \Delta \sin \gamma \ddot{\gamma} - \beta \Delta \cos \gamma \dot{\gamma}^2 + \pi_h \dot{h} \\ + q_h h + q_d h Q(d, h) + a_h h^3 = (1 + \beta) \Delta \\ + F_h(t) \Delta - F_p(t) \Delta \sin \gamma, \\ (1 + \beta) \ddot{d} + \beta \frac{\Delta}{\rho} \cos \gamma \ddot{\gamma} - \beta \frac{\Delta}{\rho} \sin \gamma \dot{\gamma}^2 + \pi_d \dot{d} \\ + q_d (1 + d) Q(d, h) = F_d(t) \frac{\Delta}{\rho} \\ + F_p(t) \frac{\Delta}{\rho} \cos \gamma. \end{aligned} \quad (56)$$

### 6.1 Two softer degrees of freedom

We are interested in applying the SFD procedure to system (56) to obtain an exact reduced-order model for the dynamics. First, we assume that  $h$  is a stiff degree of freedom and  $(\gamma, d)$  represent the softer degrees of freedom. In that case, using the notation from system (1), we can write the mass matrix  $M(q, t; \epsilon)$  and the forcing term  $F(q, \dot{q}, t; \epsilon)$  as

$$\begin{aligned} M(q, t; \epsilon) &= \begin{pmatrix} \Delta^2 & \rho \Delta \cos x_\gamma & -\Delta \sin x_\gamma \\ \beta \frac{\Delta}{\rho} \cos x_\gamma & 1 + \beta & 0 \\ -\beta \Delta \sin x_\gamma & 0 & 1 + \beta \end{pmatrix}, \\ F(q, \dot{q}, t; \epsilon) &= \begin{pmatrix} -\pi_p \dot{x}_\gamma - \Delta^2 \sin x_\gamma + \Delta^2 G_p(t) \\ \beta \frac{\Delta}{\rho} \sin x_\gamma \dot{x}_\gamma^2 - \pi_d \dot{x}_d - q_d (1 + x_d) Q(x_d, \frac{y}{\epsilon}) + F_d(t) \frac{\Delta}{\rho} + F_p(t) \frac{\Delta}{\rho} \cos x_\gamma \\ \beta \Delta \cos x_\gamma \dot{x}_\gamma^2 - \pi_h \dot{y}_h - q_h \epsilon \frac{y}{\epsilon} - q_d \epsilon \frac{y}{\epsilon} Q(x_d, \frac{y}{\epsilon}) - a_h \epsilon^3 \left( \frac{y}{\epsilon} \right)^3 \\ + (1 + \beta) \Delta + F_h(t) \Delta - F_p(t) \Delta \sin x_\gamma \end{pmatrix}. \end{aligned}$$

Here we have introduced the coordinates  $(x, y)$  by letting

$$x_\gamma = \gamma, \quad x_d = d, \quad y = h.$$

The modified mass matrices  $M_i$  and the forcing terms  $Q_i$  defined in (5) take the specific form

$$\begin{aligned} M_1 &= M_{11} - M_{12} M_{22}^{-1} M_{21} \\ &= \begin{pmatrix} \frac{\Delta^2}{1 + \beta} (1 + \beta \cos^2 x_\gamma) & \rho \Delta \cos x_\gamma \\ \beta \frac{\Delta}{\rho} \cos x_\gamma & 1 + \beta \end{pmatrix}, \\ M_2 &= M_{22} - M_{21} M_{11}^{-1} M_{12} = \frac{1 + \beta}{1 + \beta \sin^2 x_\gamma}, \\ Q_1 &= F_1 - M_{12} M_{22}^{-1} F_2 = \begin{bmatrix} q_1 \\ q_2 \end{bmatrix} \\ q_1 &= -\pi_p \dot{x}_\gamma - \Delta^2 \sin x_\gamma + \Delta^2 G_p(t) \\ &\quad + \frac{\Delta \sin x_\gamma}{1 + \beta} [\beta \Delta \cos x_\gamma \dot{x}_\gamma^2 - \pi_h \dot{y} - q_h \epsilon \frac{y}{\epsilon} \\ &\quad - q_d \epsilon \frac{y}{\epsilon} Q(x_d, \frac{y}{\epsilon}) - a_h \epsilon^3 \left( \frac{y}{\epsilon} \right)^3 + (1 + \beta) \Delta \\ &\quad + F_h(t) \Delta - F_p(t) \Delta \sin x_\gamma] \\ q_2 &= \beta \frac{\Delta}{\rho} \sin x_\gamma \dot{x}_\gamma^2 - \pi_d \dot{x}_d - q_d (1 + x_d) Q(x_d, \frac{y}{\epsilon}) \\ &\quad + F_d(t) \frac{\Delta}{\rho} + F_p(t) \frac{\Delta}{\rho} \cos x_\gamma \\ Q_2 &= F_2 - M_{21} M_{11}^{-1} F_1 = \beta \Delta \cos x_\gamma \dot{x}_\gamma^2 - \pi_h \dot{y} - q_h \epsilon \frac{y}{\epsilon} \\ &\quad - q_d \epsilon \frac{y}{\epsilon} Q(x_d, \frac{y}{\epsilon}) - a_h \epsilon^3 \left( \frac{y}{\epsilon} \right)^3 + (1 + \beta) \Delta \\ &\quad + F_h(t) \Delta - F_p(t) \Delta \sin x_\gamma \\ &\quad + \frac{(1 + \beta) \beta \sin x_\gamma}{\Delta (1 + \beta \sin^2 x_\gamma)} \left[ -\pi_p \dot{x}_\gamma - \Delta^2 \sin x_\gamma \right. \\ &\quad \left. + \Delta^2 G_p(t) \right] \\ &\quad - \frac{\beta \rho \sin x_\gamma \cos x_\gamma}{1 + \beta \sin^2 x_\gamma} \left[ \beta \frac{\Delta}{\rho} \sin x_\gamma \dot{x}_\gamma^2 - \pi_d \dot{x}_d \right. \\ &\quad \left. - q_d (1 + x_d) Q(x_d, \frac{y}{\epsilon}) + F_d(t) \frac{\Delta}{\rho} \right. \\ &\quad \left. + F_p(t) \frac{\Delta}{\rho} \cos x_\gamma \right]. \end{aligned}$$

These give the following expression for the function  $P_1$

$$P_1(x, v, \eta, w, t; \epsilon) = M_1^{-1} \begin{bmatrix} q_{1s} \\ q_{2s} \end{bmatrix}, \quad (57)$$

$$\begin{aligned}
q_{1s} &= -\pi_p v_\gamma - \Delta^2 \sin x_\gamma + \Delta^2 G_p(t) \\
&\quad + \frac{\Delta \sin x_\gamma}{1 + \beta} [\beta \Delta \cos x_\gamma v_\gamma^2 - \pi_h w_h - q_h \epsilon \eta \\
&\quad - q_d \epsilon \eta Q(x_d, \eta) - a_h \epsilon^3 \eta^3 + (1 + \beta) \Delta \\
&\quad + F_h(t) \Delta - F_p(t) \Delta \sin x_\gamma], \\
q_{2s} &= \beta \frac{\Delta}{\rho} \sin x_\gamma v_\gamma^2 - \pi_d v_d - q_d (1 + x_d) Q(x_d, \eta) \\
&\quad + F_d(t) \frac{\Delta}{\rho} + F_p(t) \frac{\Delta}{\rho} \cos x_\gamma,
\end{aligned}$$

with the inverse of  $M_1$  given by

$$M_1^{-1} = \frac{1}{\Delta^2} \begin{bmatrix} 1 + \beta & -\rho \Delta \cos x_\gamma \\ -\beta \frac{\Delta}{\rho} \cos x_\gamma & \frac{\Delta^2}{1 + \beta} (1 + \beta \cos^2 x_\gamma) \end{bmatrix}.$$

The function  $P_2$  takes the specific form

$$\begin{aligned}
P_2(x, v, \eta, w, t; \epsilon) &= \epsilon \left( \frac{1 + \beta \sin^2 x_\gamma}{1 + \beta} \right) \left( \beta \Delta \cos x_\gamma v_\gamma^2 - \pi_h w_h \right. \\
&\quad - q_h \epsilon \eta - q_d \epsilon \eta Q(x_d, \eta) - a_h \epsilon^3 \eta^3 + (1 + \beta) \Delta \\
&\quad + F_h(t) \Delta - F_p(t) \Delta \sin x_\gamma \\
&\quad + \frac{(1 + \beta) \beta \sin x_\gamma}{\Delta (1 + \beta \sin^2 x_\gamma)} [-\pi_p v_\gamma - \Delta^2 \sin x_\gamma \\
&\quad + \Delta^2 G_p(t)] \\
&\quad - \frac{\beta \rho \sin x_\gamma \cos x_\gamma}{1 + \beta \sin^2 x_\gamma} \left[ \beta \frac{\Delta}{\rho} \sin x_\gamma v_\gamma^2 - \pi_d v_d \right. \\
&\quad - q_d (1 + x_d) Q(x_d, \eta) + F_d(t) \frac{\Delta}{\rho} \\
&\quad \left. \left. + F_p(t) \frac{\Delta}{\rho} \cos x_\gamma \right] \right). \quad (58)
\end{aligned}$$

We observe that  $\lim_{\epsilon \rightarrow 0} P_2(x, v, \eta, w, t; \epsilon) \equiv 0$ , and therefore assumptions (A1)–(A3) are not satisfied without further assumptions on the parameters that ensure the stiff-soft partition of the coordinates. To this end, we express the stiffness of the  $y$  degree of freedom by letting

$$\begin{aligned}
\Delta &= \frac{l}{L} = \frac{\delta}{\epsilon}, \quad \rho = \frac{D}{L} = \frac{\phi}{\epsilon}, \quad q_d = \frac{\omega_d^2}{\omega_p^2} = \Omega_d^2, \\
q_h &= \frac{\omega_h^2}{\omega_p^2} = \frac{\Omega_h^2}{\epsilon^2}, \quad a_h = \frac{\alpha_h}{\epsilon^4}, \\
\pi_h &= \frac{C_h}{\omega_p M} = \frac{\mu_h}{\epsilon}, \quad \pi_d = \frac{C_d}{\omega_p M} = \mu_d,
\end{aligned}$$

$$\pi_p = \frac{c_p}{\omega_p m L^2} = \frac{c_p}{\omega_p m \left(\frac{\epsilon l}{\delta}\right)^2} = \frac{c_p \delta^2}{\omega_p m \epsilon^2 l^2} = \frac{\mu_p}{\epsilon^2}. \quad (59)$$

In this parameter range, assumptions (A1)–(A3) are satisfied, as we show in “Appendix 4”. The reduced model arising from these calculations is of the form

$$\begin{aligned}
\ddot{\gamma} &= \frac{\omega_p^2 (M + m)}{M + m \sin^2 \gamma} \left( -\frac{c_p}{\omega_p^2 m l^2} \dot{\gamma} - \sin \gamma + \frac{f_p(t)}{m g} \right) \\
&\quad - \frac{\omega_p^2 M \cos \gamma}{M + m \sin^2 \gamma} \left( \frac{m}{M \omega_p^2} \sin \gamma \dot{\gamma}^2 - \frac{C_d}{\omega_p^2 M l} \dot{d} \right. \\
&\quad \left. - \frac{K_d}{M g} d + \frac{f_d(t)}{M g} + \frac{f_p(t)}{M g} \cos \gamma \right) + \mathcal{O}(\epsilon), \quad (60)
\end{aligned}$$

$$\begin{aligned}
\ddot{d} &= \frac{\omega_p^2 D M}{M + m \sin^2 \gamma} \left( \frac{m l}{M D \omega_p^2} \sin \gamma \dot{\gamma}^2 - \frac{C_d}{M D \omega_p^2} \dot{d} \right. \\
&\quad \left. - \frac{K_d l}{M g D} d + \frac{f_d(t) l}{M g D} + \frac{f_p(t) l}{M g D} \cos \gamma \right) \\
&\quad - \frac{\omega_p^2 D m \cos \gamma}{M + m \sin^2 \gamma} \left( -\frac{c_p}{\omega_p^2 m D l} \dot{\gamma} - \frac{l}{D} \sin \gamma \right. \\
&\quad \left. + \frac{l}{D} \frac{f_p(t)}{m g} \right) + \mathcal{O}(\epsilon). \quad (61)
\end{aligned}$$

We have implemented this model in *Mathematica* to show how a general trajectory  $x(t)$  of the full system is attracted to reduced model trajectories the slow manifold  $\mathcal{M}_\epsilon$ . A graphical illustration of this behavior is shown in Fig. 8.


For a numerical illustration of the accuracy of the reduced model, we choose the following values for the system parameters:

$$\begin{aligned}
l &= D = 6 \text{ m}, \quad L = 1 \text{ m}, \quad M = m = 1 \text{ kg}, \\
K_h &= 600 \text{ N/m}, \quad \Gamma_h = 0.5 \text{ N/m}^3, \quad K_d = 2 \text{ N/m}, \\
C_d &= 0.33 \cdot \omega_p \cdot M \text{ kg/s}, \quad C_h = 3 \cdot \omega_p \cdot M \text{ kg/s}, \\
c_p &= 0.33 \cdot \omega_p \cdot m \cdot L^2 \text{ (kg} \cdot \text{m}^2\text{)/s}, \quad g = 9.81 \text{ m/s}^2, \\
f_p(t) &= 0.5 \cdot \sin(t) \text{ N}, \quad f_h(t) = f_d(t) = 0.5 \\
&\quad \cdot \sin(3t) \text{ N}, \quad \epsilon = 1 \cdot 10^{-8}.
\end{aligned}$$

We give the full system the initial condition

$$\begin{aligned}
q_0 &= (\gamma_0, d_0, \dot{\gamma}_0, \dot{d}_0, h_0, \dot{h}_0) \\
&= (1.000, 1.200, 0.000, 0.000, 0.08182, 0.005301),
\end{aligned}$$

which lies off the slow manifold  $\mathcal{M}_\epsilon$ , then integrate the trajectory starting from this initial condition in forward time. We track the Euclidean distance

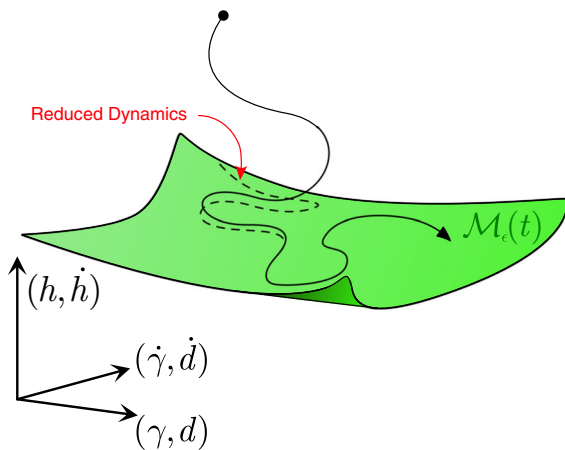


**Fig. 8** Illustration of the attracting slow manifold  $\mathcal{M}_\epsilon$  for mechanical system (56), graphed over the two slow degrees of freedom  $x_\gamma$  and  $x_d$  and their corresponding velocities. A general trajectory  $q(t)$  is attracted to the slow manifold, synchronizing exponentially fast with a trajectory of reduced dynamics (dashed line)


between the fast variables  $(h(t), \dot{h}(t))$  and the explicitly computable slow manifold  $\mathcal{M}_\epsilon$  for the given slow variables  $(\gamma(t), d(t), \dot{\gamma}(t), \dot{d}(t))$ . When the fast variables are  $\mathcal{O}(10^{-5})$  close to  $\mathcal{M}_\epsilon$  after the time value  $t \geq t_\epsilon = 15.6\text{ s}$ , we take the point  $x_\epsilon(t_\epsilon)$  belonging to the full trajectory and use the slow coordinates  $(\gamma(t_\epsilon), d(t_\epsilon), \dot{\gamma}(t_\epsilon), \dot{d}(t_\epsilon))$  of this point as an initial position for reduced model (60) and (61). Consecutively, we simulate the reduced model in backward and forward time and compare the results with the results obtained from the full model (see Figs. 9, 10, 11).

## 6.2 Two stiffer degrees of freedom

We reconsider here the same mechanical system as in Sect. 6.1, but assume now that both the  $d$  and  $h$  variables represent stiff degrees of freedom, while  $\gamma$  still describes a softer degree of freedom. In this set-

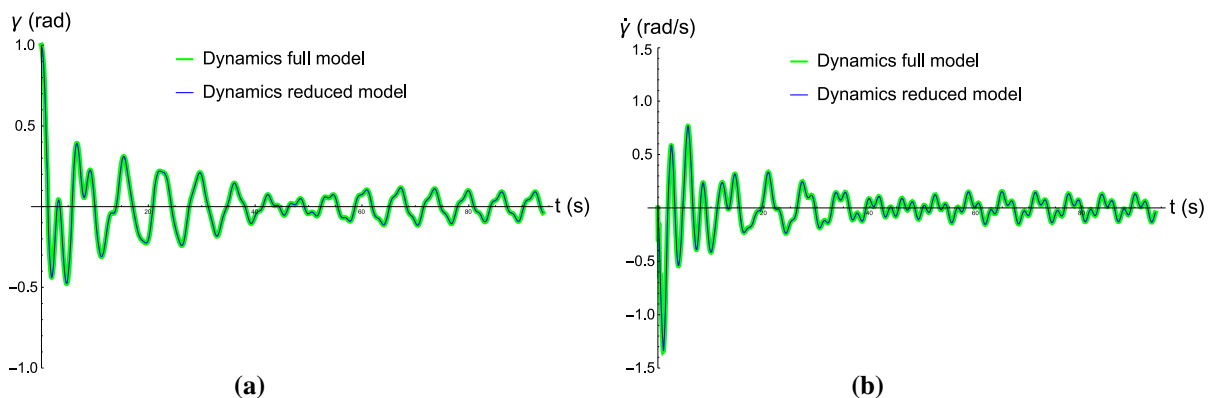


**Fig. 9** Exponentially fast synchronization of the softer  $(\gamma, \dot{\gamma})$  coordinates of the full trajectory and of a reduced model trajectory

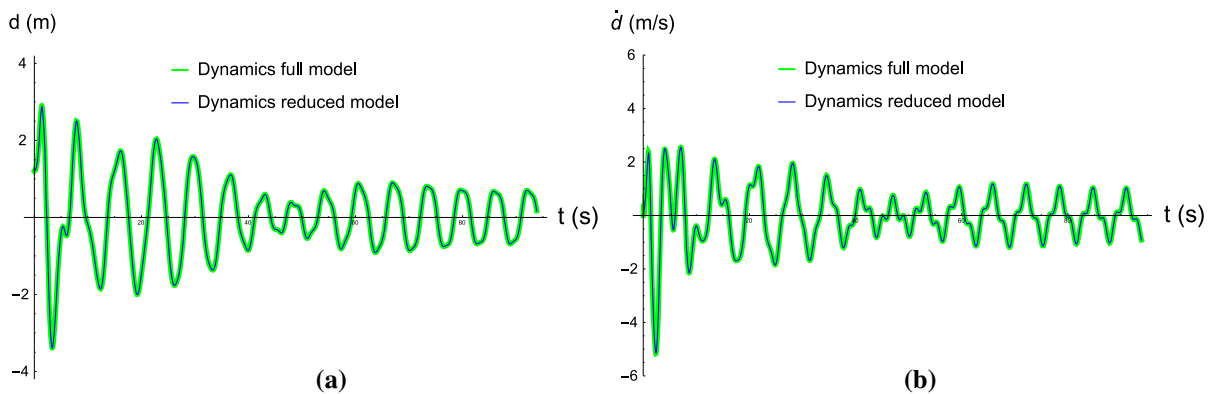

**Fig. 10** Exponentially fast synchronization of the softer  $(d, \dot{d})$  coordinates of the full trajectory and of a reduced model trajectory



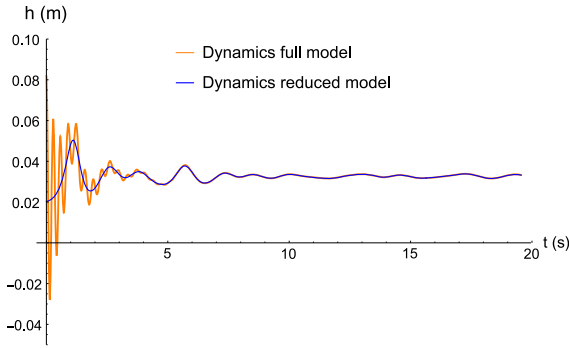

**Fig. 11** Exponentially fast convergence of the fast coordinate  $h$  along the full trajectory to the same coordinate along a trajectory of the reduced system

ting, the anticipated slow variable  $x$  and fast variable  $y = (y_d, y_h)$  are defined as

$$x_\gamma = \gamma, \quad y_d = d, \quad y_h = h,$$

We express the stiffness of the  $y$  degree of freedom by letting

$$\begin{aligned} \Delta = \frac{l}{L} = \frac{\delta}{\epsilon}, \quad q_h = \frac{\omega_h^2}{\omega_p^2} = \frac{\Omega_h^2}{\epsilon^2}, \\ q_d = \frac{\omega_d^2}{\omega_p^2} = \frac{\Omega_d^2}{\epsilon^2}, \quad a_h = \frac{\alpha_h}{\epsilon^4}, \\ \pi_h = \frac{C_h}{\omega_p M} = \frac{\mu_h}{\epsilon}, \quad \pi_d = \frac{C_d}{\omega_p M} = \frac{\mu_d}{\epsilon}, \\ \pi_p = \frac{c_p}{\omega_p m L^2} = \frac{c_p}{\omega_p m \left(\frac{\epsilon l}{\delta}\right)^2} = \frac{c_p \delta^2}{\omega_p m \epsilon^2 l^2} = \frac{\mu_p}{\epsilon^2}. \end{aligned} \quad (62)$$

As we show in “Appendix 5”, assumptions (A1)–(A3) are satisfied in the parameter regime represented by the above scaling for  $0 < \epsilon \ll 1$ . In the scaled variables, we have

$$M_1 = \frac{\delta^2}{\epsilon^2 (1 + \beta)}.$$

Thus, the mass matrix  $M_1$  associated with the slow degree of freedom is not differentiable at  $\epsilon = 0$ . Therefore, only the more general form (18) of the reduced model is applicable, giving

$$\begin{aligned} \ddot{x} &= P_1(x, \dot{x}, G_0(x, \dot{x}, t), 0, t; 0) + \mathcal{O}(\epsilon) \\ &= -\frac{\mu_p}{\delta^2} \dot{x} - \sin x + G_p(t) + \mathcal{O}(\epsilon). \end{aligned}$$

Scaling back to the original time, we conclude that at leading order, the exact reduced-order model on the

two-dimensional, attracting slow manifold  $\mathcal{M}_\epsilon$  is given by

$$\ddot{x} + \frac{\mu_p}{\delta^2} \dot{x} + \sin x = G_p(t) + \mathcal{O}(\epsilon),$$

or, equivalently,

$$m l^2 \ddot{x} + c_p \dot{x} + m g l \sin x = f_p(t) l + \mathcal{O}(\epsilon). \quad (63)$$

As for the example treated in Sect. 6.1, we illustrate numerically that trajectories of the full system synchronize exponentially fast with those of the reduced-order model. For the parameter values

$$\begin{aligned} l &= 6 \text{ m}, \quad L = 3 \text{ m}, \quad M = 0.25 \text{ kg}, \quad m = 0.5 \text{ kg}, \\ K_h &= 2000 \text{ N/m}, \quad \Gamma_h = 0.5 \text{ N/m}^3, \quad K_d = 280 \text{ N/m}, \\ C_d &= 3 \cdot \omega_p \cdot M \text{ kg/s}, \quad C_h = 3 \cdot \omega_p \cdot M \text{ kg/s}, \\ c_p &= \omega_p \cdot m \cdot L^2 \text{ (kg} \cdot \text{m}^2\text{)/s}, \quad g = 9.81 \text{ m/s}^2, \\ f_p(t) &= 0.6 \cdot \sin(\omega_p t), \quad f_h(t) = f_d(t) = 0, \\ \epsilon &= 1 \cdot 10^{-8}, \end{aligned}$$

and the initial condition,


$$\begin{aligned} x_0 &= (\gamma_0, \dot{\gamma}_0, h_0, d_0, \dot{h}_0, \dot{d}_0) \\ &= (1.000, 0.000, 0.002842, 0.02296, 0.0005551, \\ &\quad -0.002546), \end{aligned}$$

we illustrate the convergence of the trajectory to a trajectory of the reduced model on the slow manifold in Fig. 12). The target model trajectory was identified as earlier in the soft-soft-stiff version of the same example.

## 7 Conclusions

We have developed a methodology for exact model reduction in multi-degree-of-freedom mechanical systems with softer and stiffer degrees of freedom. This SFD approach allows for a systematic identification of parameter regimes in which an attracting slow manifold exists. On this invariant manifolds, the stiff variables are enslaved to the remaining softer variables.

We have derived explicit expressions for the slow manifold and for the first two orders of the reduced flow on this manifold. The latter formulas provide a mathematically exact reduced-order model with which trajectories of the full system synchronize at an a priori predictable exponential rate. We have also identified a domain boundary over which the slow manifold generically loses its stability and hence the dynamics on it no

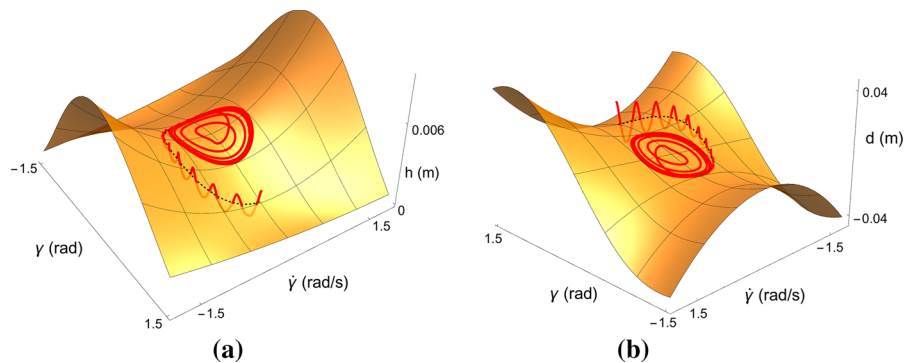

**Fig. 12** Instantaneous projection of the slow manifold  $\mathcal{M}_\epsilon$  for the periodically forced, stiff-stiff-soft mechanical system at  $t = 20$  s. **a** A trajectory of the full system is launched at the initial condition  $x_0 = (1.000, 0.000, 0.002842, 0.02296, 0.0005551, -0.002546)$  and integrated in forward time. Displayed in red is the  $h$  component of the corresponding full system trajectory

longer serves as a reduced-order model for the mechanical system.

Slow-fast reduction has previously been carried out with varying levels of mathematical rigor in several specific mechanical model problems (see the Introduction for a review). Our contributions here are: (i) explicit conditions under which an attracting slow manifold is guaranteed to exist in a general, multi-degree-of-freedom mechanical system; (ii) readily applicable general formulas for reduced-order models on such manifolds. All these results follow from the application of classic results from geometric singular perturbation theory (see, e.g., Fenichel [7], Jones [18]).

We have found that the SFD conditions yield reduced-order models that satisfy the basic requirements (R1)–(R2) we have formulated for a mathematically exact model reduction procedure. As we have shown explicitly in Sect. 5, the formal methods of static condensation and modal derivatives in structural dynamics can only be justified if the conditions of SFD are satisfied. When these conditions do not hold, the reduced-order models produced by these methods are inaccurate or even qualitatively incorrect.

Importantly, the SFD approach does not require the explicit identification of eigenfrequencies and normal modes for a linearized system, which is a numerically costly undertaking for high-degree-of-freedom systems. Instead, the SFD can be carried out based on a general identification of stiffer and softer vibratory modes, without an explicit decoupling of these modes.

that converges to the slow manifold and synchronizes with the reduced-order model (*dashed*), shown up to time  $t_\epsilon = 15.6$  s. **b** Convergence of the horizontal coordinate  $d$  (*red*) to the slow manifold, synchronizing with the dynamics of the reduced-order model (*dashed*). (Color figure online)

This flexibility for the method enables its application in structural vibrations problems such as those including forced and damped beams (cf. Jain et al. [17] for a detailed example involving the von Kármán beam model).

An extension of the SFD methodology to stiff-soft continuum vibrations described by partial differential equations should also be possible through an appropriate extension of the necessary geometric singular perturbation results to infinite dimensions (see, e.g., Menon and Haller [23]).

**Acknowledgements** We would like to thank Paolo Tiso, Daniel Rixen and Shobhit Jain for useful conversations and for their insights on the subject of this paper.

## Appendix 1: Proof of the main result

### First-order autonomous form

By the nondegeneracy of  $M$ , the matrices  $M_{11}$  and  $M_{22}$  are necessarily invertible, which enables us to split (1) in the form

$$\begin{aligned} \begin{bmatrix} M_{11} - M_{12}M_{22}^{-1}M_{21} \end{bmatrix} \ddot{x} &= -F_1 - M_{12}M_{22}^{-1}F_2, \\ \begin{bmatrix} M_{22} - M_{21}M_{11}^{-1}M_{12} \end{bmatrix} \ddot{y} &= -F_2 - M_{21}M_{11}^{-1}F_1. \end{aligned}$$

The nondegeneracy of  $M$  also implies that the two matrices on the left-hand side of this system must be

invertible, leading to the explicit second-order dynamical system

$$\begin{aligned}\ddot{x} &= M_1^{-1} \left( x, \frac{y}{\epsilon}, t; \epsilon \right) Q_1 \left( x, \dot{x}, \frac{y}{\epsilon}, \dot{y}, t; \epsilon \right), \\ \ddot{y} &= M_2^{-1} \left( x, \frac{y}{\epsilon}, t; \epsilon \right) Q_2 \left( x, \dot{x}, \frac{y}{\epsilon}, \dot{y}, t; \epsilon \right),\end{aligned}\quad (64)$$

with  $M_i$  and  $Q_i$  defined in (5).

In order to convert this system into a first-order autonomous system, we first introduce a phase variable  $\varphi \in \mathcal{C}$  such that

$$\mathcal{C} = \begin{cases} S^1, & M_i, Q_i \text{ are periodic in } t, \\ \mathbb{T}^k, & M_i, Q_i \text{ are quasiperiodic with} \\ & k \text{ independent frequencies in } t, \\ [a, b], & M_i, Q_i \text{ are aperiodic in } t. \end{cases}$$

We then let

$$v = \dot{x}, \quad w = \dot{y},$$

and rewrite Eq. (64) as a first-order autonomous system on the extended phase space  $\mathcal{P} = \mathbb{R}^s \times \mathbb{R}^s \times \mathbb{R}^f \times \mathbb{R}^f \times \mathcal{C}$  in the form

$$\begin{aligned}\dot{x} &= v, \\ \dot{v} &= M_1^{-1} \left( x, \frac{y}{\epsilon}, \varphi; \epsilon \right) Q_1 \left( x, v, \frac{y}{\epsilon}, w, \varphi; \epsilon \right), \\ \dot{y} &= w, \\ \dot{w} &= M_2^{-1} \left( x, \frac{y}{\epsilon}, \varphi; \epsilon \right) Q_2 \left( x, v, \frac{y}{\epsilon}, w, \varphi; \epsilon \right), \\ \dot{\varphi} &= \omega,\end{aligned}$$

where

$$\omega = \begin{cases} \omega_1, & \mathcal{C} = S^1, \\ (\omega_1, \dots, \omega_k), & \mathcal{C} = \mathbb{T}^k, \\ 1, & \mathcal{C} = [a, b]. \end{cases}$$

### Timescale separation

Up to this point, the splitting  $q = (x, y)$  has been arbitrary. We now seek conditions under which the  $x$ -degrees of freedom serve as coordinates for a reduced-order model. For such a reduced-order model to capture effectively the long-term system dynamics, we require the  $y$  variables to become enslaved to the  $x$  variables and to the phase variable  $\varphi$  over a timescale that is an order of magnitude faster than the characteristic timescale of the reduced-order model (cf. the requirement (R2) in the Introduction). To this end, we introduce a characteristic fast timescale  $\tau$  by letting  $t = \epsilon\tau$ , with small, non-dimensional parameter  $0 < \epsilon \ll 1$ .

Denoting differentiation with respect to  $\tau$  by prime, we obtain the rescaled equations

$$\begin{aligned}x' &= \epsilon v, \\ v' &= \epsilon M_1^{-1} \left( x, \frac{y}{\epsilon}, \varphi; \epsilon \right) Q_1 \left( x, v, \frac{y}{\epsilon}, w, \varphi; \epsilon \right), \\ \varphi' &= \epsilon \omega, \\ y' &= \epsilon w, \\ w' &= \epsilon M_2^{-1} \left( x, \frac{y}{\epsilon}, \varphi; \epsilon \right) Q_2 \left( x, v, \frac{y}{\epsilon}, w, \varphi; \epsilon \right).\end{aligned}\quad (65)$$

In this new scale, the evolution in the  $(y, w)$  variables should be taking place at an  $\mathcal{O}(1)$  speed with respect to  $\epsilon$ , whereas the  $(x, v)$  variables should experience an  $\mathcal{O}(\epsilon)$  rate of change. By the structure of system (65), this timescale separation will only arise if we localize  $y$  by letting  $y = \epsilon\eta$ . With this scaling, we obtain the equations

$$\begin{aligned}x' &= \epsilon v, \\ v' &= \epsilon M_1^{-1} (x, \eta, \varphi; \epsilon) Q_1 (x, v, \eta, w, \varphi; \epsilon), \\ \varphi' &= \epsilon \omega, \\ \eta' &= w, \\ w' &= \epsilon M_2^{-1} (x, \eta, \varphi; \epsilon) Q_2 (x, v, \eta, w, \varphi; \epsilon).\end{aligned}\quad (66)$$

To ensure that  $w$  also varies at  $\mathcal{O}(1)$  speeds for small enough  $\epsilon$ , the function  $\epsilon M_2^{-1} (x, \eta, \varphi; \epsilon) Q_2 (x, v, \eta, w, \varphi; \epsilon)$  must have a smooth,  $\mathcal{O}(1)$  limit as  $\epsilon \rightarrow 0$ . We, therefore, must require the function

$$\begin{aligned}P_2(x, v, \eta, w, \varphi; \epsilon) \\ = \epsilon M_2^{-1} (x, \eta, \varphi; \epsilon) Q_2 (x, v, \eta, w, \varphi; \epsilon)\end{aligned}$$

to have a smooth limit at  $\epsilon = 0$ , defined by a smooth function

$$P_2(x, v, \eta, w, \varphi; 0) := \lim_{\epsilon \rightarrow 0} P_2(x, v, \eta, w, \varphi; \epsilon) \quad (67)$$

on an open and bounded subset of the extended phase space  $\mathcal{P}$ . In order to be able to carry out a perturbation argument from this limit, we also require that

$$P_1(x, v, \eta, w, \varphi; \epsilon) = M_1^{-1} (x, \eta, \varphi; \epsilon) Q_1 (x, v, \eta, w, \varphi; \epsilon)$$

has a similar smooth limit at  $\epsilon = 0$ , defined as

$$P_1(x, v, \eta, w, \varphi; 0) := \lim_{\epsilon \rightarrow 0} P_1(x, v, \eta, w, \varphi; \epsilon).$$

With these quantities and assumptions, (66) becomes

$$\begin{aligned}x' &= \epsilon v, \\ v' &= \epsilon P_1(x, v, \eta, w, \varphi; \epsilon), \\ \varphi' &= \epsilon \omega, \\ \eta' &= w, \\ w' &= P_2(x, v, \eta, w, \varphi; \epsilon).\end{aligned}\quad (68)$$

### Existence of a critical manifold

We want to ensure the existence of a reduced-order model in which the  $(\eta(t), w(t))$  dynamics can be uniquely expressed, at least for large enough times, as a function of the  $(x(t), v(t))$  dynamics and the time  $t$ . In geometric terms, this amounts to the existence of an invariant manifold  $\mathcal{M}_\epsilon$  that is a graph over the  $(x, v, t)$  variables and attracts all nearby solutions of the full system.

We require our reduced model to be smooth in  $\epsilon$ , which is equivalent to requiring a smooth limit  $\mathcal{M}_0 = \lim_{\epsilon \rightarrow 0} \mathcal{M}_\epsilon$  for the invariant manifold in the  $\epsilon = 0$  limit of system (68). This limiting system can be written as

$$\begin{aligned} x' &= 0, \\ v' &= 0, \\ \varphi' &= 0, \\ \eta' &= w, \\ w' &= P_2(x, v, \eta, w, \varphi; 0). \end{aligned} \quad (69)$$

In this limit, therefore,  $(x, v, \varphi) \equiv (x_0, v_0, \varphi_0)$  plays the role of a constant parameter vector. Any trajectory of the fast dynamics

$$\begin{aligned} \eta' &= w, \\ w' &= P_2(x_0, v_0, \eta, w, \varphi_0; 0), \end{aligned} \quad (70)$$

therefore, gives rise to a  $(2s+1)$ -dimensional invariant manifold for the full system. Along nontrivial trajectories of (70), however, the fast  $(\eta, v)$  variables change and hence are *not* uniquely enslaved to  $(x_0, v_0, \varphi_0)$ , as required for the smooth limit of a reduced-order model. Consequently, only invariant manifolds arising from fixed points of (70) can be considered as limits of reduced-order models.

Such fixed points of (70) form a set

$$\mathcal{M}_0 = \{(x, v, \eta, w, \varphi) \in \mathcal{P} : w = 0, P_2(x, v, \eta, w, \varphi; 0) = 0\}.$$

To be a limit of a slow manifold carrying a reduced-order model,  $\mathcal{M}_0$  must be a smooth graph over an open domain  $\mathcal{D}_0 \subset \mathbb{R}^m \times \mathbb{R}^m \times \mathcal{C}$  of the space  $(x, v, t)$  variables. By the implicit function theorem, this is equivalent to the requirement that

$$\det[\partial_\eta P_2(x, v, \eta, 0, \varphi; 0)] \neq 0, \quad (71)$$

should hold at all points  $(x, v, \eta, w, \varphi) \in \mathcal{M}_0$ . This condition ensures that if  $\mathcal{M}_0$  is nonempty, then it is

a  $2s+1$  dimensional differentiable manifold that can locally be expressed as a smooth graph

$$\begin{pmatrix} \eta \\ w \end{pmatrix} = \begin{pmatrix} G_0(x, v, \varphi) \\ 0 \end{pmatrix}, \quad (x, v, \varphi) \in \mathcal{D}_0 \quad (72)$$

with the function  $G_0 : \mathcal{D}_0 \rightarrow \mathbb{R}^f$  satisfying the identity

$$P_2(x, v, G_0(x, v, \varphi), 0, \varphi; 0) = 0. \quad (73)$$

We refer to the part of  $\mathcal{M}_0$  satisfying (71) as the critical manifold associated with the limiting system (69). In our discussion of assumption (A2), we use the term *critical manifold* for the  $t = \text{const.}$  times slice  $\mathcal{M}_0(t)$  of  $\mathcal{M}_0$ .

### Stability of $\mathcal{M}_0$

The critical manifold must be normally attracting to persist as an attracting invariant slow manifold in the full system (68). The stability type of  $\mathcal{M}_0$  can be identified by analyzing the linearization of the fast flow (70) at the fixed points forming  $\mathcal{M}_0$ .

The stability of the manifold  $\mathcal{M}_0$  at the fixed point family  $(\eta_0, w_0) = (G(x_0, v_0, \varphi_0), 0)$  of the decoupled equations is governed by the eigenvalues of the Jacobian

$$J = \begin{bmatrix} 0 & I \\ \partial_\eta P_2 & \partial_w P_2 \end{bmatrix}_{(x, v, \eta, w, t; \epsilon) = (x_0, v_0, G_0(y_0, w_0, \varphi_0), 0, \varphi_0; 0)}. \quad (74)$$

The matrix  $J$  has eigenvalues with strictly negative real parts precisely when the fixed point of the linear vibratory system

$$\begin{aligned} u'' - \partial_w P_2(x_0, v_0, G_0(x_0, v_0, t_0), 0, \varphi_0; 0) u' \\ - \partial_\eta P_2(x_0, v_0, G_0(x_0, v_0, \varphi_0), 0, \varphi_0; 0) u = 0 \end{aligned} \quad (75)$$

is asymptotically stable for the parameter values  $(x_0, v_0, \varphi_0) \in \mathcal{D}_0$ , which is guaranteed by assumption (A3). In that case, a compact subset of the critical manifold  $\mathcal{M}_0$  is a compact normally hyperbolic invariant manifold with boundary when  $(x_0, v_0, \varphi_0)$  is restricted to a domain with a smooth boundary. (In case of  $\mathcal{C} = [a, b]$ , one has to select  $a$  and  $b$  as smooth functions of  $(y_0, t_0)$  to eliminate non-smooth corners in  $\partial\mathcal{M}_0$ . This can always be done without loss of generality.)

### Existence of a slow manifold

Under the above conditions, the results of Fenichel [7] guarantee for full system (68) the existence of an attracting slow manifold  $\mathcal{M}_\epsilon$  that is  $\mathcal{O}(\epsilon)$   $C^r$ -close to  $\mathcal{M}_0$ , and hence continues to be a graph of the form

$$\begin{aligned} \begin{pmatrix} \eta \\ w \end{pmatrix} &= \begin{pmatrix} G_\epsilon(x, v, \varphi) \\ \epsilon H_\epsilon(x, v, \varphi) \end{pmatrix} \\ &= \begin{pmatrix} G_0(x, v, \varphi) + \epsilon G_1(x, v, \varphi) + \mathcal{O}(\epsilon^2) \\ \epsilon H_0(x, v, \varphi) + \epsilon^2 H_1(x, v, \varphi) + \mathcal{O}(\epsilon^3) \end{pmatrix}, \\ (x, v, \varphi) &\in \mathcal{D}_0, \end{aligned}$$

with appropriate smooth functions  $G_\epsilon$  and  $H_\epsilon$ . The relation  $\eta' = w$  in (68) imposes the relationships

$$\begin{aligned} \frac{d}{d\tau} \left[ G_0(x, v, \varphi) + \epsilon G_1(x, v, \varphi) + \mathcal{O}(\epsilon^2) \right] \\ = \epsilon H_0(x, v, \varphi) + \epsilon^2 H_1(x, v, \varphi) + \mathcal{O}(\epsilon^3), \\ \frac{d}{d\tau} \left[ \epsilon H_0(x, v, \varphi) + \epsilon^2 H_1(x, v, \varphi) + \mathcal{O}(\epsilon^3) \right] \\ = P_2(x, v, G_\epsilon(x, v, \varphi), \epsilon H_\epsilon(x, v, \varphi), \varphi; \epsilon). \end{aligned}$$

Carrying out the differentiation in these two equations gives

$$\begin{aligned} & \left( \epsilon \partial_x G_0 + \epsilon^2 \partial_x G_1 \right) v \\ & + \left( \epsilon \partial_v G_0 + \epsilon^2 \partial_v G_1 \right) P_1(x, v, G_\epsilon, \epsilon H_\epsilon, \varphi; \epsilon) \\ & + \left( \epsilon \omega \partial_\varphi G_0 + \epsilon^2 \omega \partial_\varphi G_1 \right) + \mathcal{O}(\epsilon^3) \\ & = \epsilon H_0 + \epsilon^2 H_1 + \mathcal{O}(\epsilon^3), \\ & \left( \epsilon^2 \partial_x H_0 + \epsilon^3 \partial_x H_1 \right) v \\ & + \left( \epsilon^2 \partial_v H_0 + \epsilon^3 \partial_v H_1 \right) P_1(x, v, G_\epsilon, \epsilon H_\epsilon, \varphi; \epsilon) \\ & + \left( \epsilon^2 \omega \partial_\varphi H_0 + \epsilon^3 \omega \partial_\varphi H_1 \right) + \mathcal{O}(\epsilon^4) \\ & = P_2(x, v, G_\epsilon(x, v, \varphi), \epsilon H_\epsilon(x, v, \varphi), \varphi; \epsilon). \end{aligned}$$

We Taylor-expand these two equations, then equate the  $\mathcal{O}(\epsilon)$  and  $\mathcal{O}(\epsilon^2)$  terms in the first equation, as well as  $\mathcal{O}(\epsilon)$  terms in the second equation, to obtain

$$\begin{aligned} H_0(x, v, \varphi) &= \partial_x G_0(x, v, \varphi) v \\ &+ \partial_v G_0(x, v, \varphi) P_1(x, v, G_0(x, v, \varphi), 0, \varphi; 0) \\ &+ \omega \partial_\varphi G_0(x, v, \varphi), \\ H_1(x, v, \varphi) &= \partial_x G_1(x, v, \varphi) v \\ &+ \partial_v G_1(x, v, \varphi) P_1(x, v, G_0(x, v, \varphi), 0, \varphi; 0) \\ &+ \omega \partial_\varphi G_1(x, v, \varphi) \\ &+ \partial_v G_0(x, v, \varphi) \left( \partial_\eta P_1(x, v, G_0(x, v, \varphi), 0, \varphi; 0) \right. \end{aligned}$$

$$\begin{aligned} & \times G_1(x, v, \varphi) \\ & + \partial_w P_1(x, v, G_0(x, v, \varphi), 0, \varphi; 0) H_0(x, v, \varphi) \\ & + \partial_\epsilon P_1(x, v, G_0(x, v, \varphi), 0, \varphi; 0) \Big), \\ G_1(x, v, \varphi) &= - \left[ D_\eta P_2(x, v, G_0(x, v, \varphi), 0, \varphi; 0) \right]^{-1} \\ & \times D_w P_2(x, v, G_0(x, v, \varphi), 0, \varphi; 0) H_0(x, v, \varphi) \\ & - \left[ D_\eta P_2(x, v, G_0(x, v, \varphi), 0, \varphi; 0) \right]^{-1} \\ & \times D_\epsilon P_2(x, v, G_0(x, v, \varphi), 0, \varphi; 0). \end{aligned}$$

In terms of the original variables, therefore, the slow manifold satisfies

$$\begin{aligned} y &= \epsilon G_0(x, \dot{x}, t) + \epsilon^2 G_1(x, \dot{x}, t) + \mathcal{O}(\epsilon^3), \\ \dot{y} &= \epsilon H_0(x, \dot{x}, t) + \epsilon^2 H_1(x, \dot{x}, t) + \mathcal{O}(\epsilon^3), \end{aligned}$$

where the functions  $H_0$ ,  $G_1$  and  $H_1$  are those listed in (17).

### The reduced flow on the slow manifold

The slow manifold  $\mathcal{M}_\epsilon$  attracts all nearby solutions; thus, the reduced flow on  $\mathcal{M}_\epsilon$  will serve as the type of reduced-order model we have been seeking to construct (cf. requirement (R1) in the Introduction). The reduced equations on  $\mathcal{M}_\epsilon$  can be written by restricting the  $(x, v, \phi)$  components of our system (68) to  $\mathcal{M}_\epsilon$ , which yields

$$\begin{aligned} x' &= \epsilon v, \\ v' &= \epsilon P_1(x, v, G_0(x, v, \varphi), 0, \varphi; 0) \\ &+ \epsilon^2 \left[ D_\eta P_1(x, v, G_0(x, v, \varphi), 0, \varphi; 0) G_1(x, v, \varphi) \right. \\ &+ D_w P_1(x, v, G_0(x, v, \varphi), 0, \varphi; 0) H_0(x, v, \varphi) \\ &+ D_\epsilon P_2(x, v, G_0(x, v, \varphi), 0, \varphi; 0) \Big] + \mathcal{O}(\epsilon^2), \\ \varphi' &= \epsilon \omega. \end{aligned}$$

In the original set of coordinates, this reduced flow can be written as in Eq. (18).

Using the definition of  $P_1$ , we find that if  $M_1(x, G_0(x, \dot{x}, t), t)$  has a smooth limit at  $\epsilon = 0$ , then the reduced equation can be multiplied by  $M_1(x, G_0(x, \dot{x}, t), t)$  to yield the leading-order equivalent form of (18) as given in Eq. (19). When necessary, the  $\mathcal{O}(\epsilon)$  terms in (19) can also be computed from the formulas we have given above.

### Convergence to the reduced trajectories

By the invariant foliation results of Fenichel [7], for small enough  $\epsilon$  and for motions close enough to the



critical manifold, the  $y(t)$  component of all solutions of Eq. (1) synchronizes exponentially fast with solutions of reduced-order model (18).

Specifically, the local stable manifold  $W_{loc}^s(\mathcal{M}_\epsilon)$  is foliated by an invariant family of class  $C^r$  stable fibers  $f^s(p)$ . This  $(2s + \dim \mathcal{C})$ -parameter fiber family is parametrized by the base points  $p \in \mathcal{M}_\epsilon$  of the fibers. Each fiber is a class  $C^{r-1}$  manifold whose dimension is  $2f$ . The invariance of the fiber family means that for the flow map  $F^\tau: \mathcal{P} \rightarrow \mathcal{P}$  of system (68), we have

$$F^\tau(f^s(p)) \subset f^s(F^\tau(p))$$

for all  $\tau > 0$ . Furthermore, the trajectory of the reduced flow through a fiber base point  $p$  attracts exponentially all trajectories that cross the fiber  $f^s(p)$ . Specifically, if  $p = (x_R(\tau_0), v_R(\tau_0), \varphi_R(\tau_0))$  and  $(x(\tau_0), v(\tau_0), \varphi(\tau_0), \eta(\tau_0), w(\tau_0)) \in f^s(p)$ , then for all  $\tau$  values satisfying

$$(x(\tau), v(\tau), \varphi(\tau), \eta(\tau), w(\tau)) \in W_{loc}^s(\mathcal{M}_\epsilon),$$

we have the estimate

$$\begin{aligned} & \left| \begin{pmatrix} x(\tau) - x_R(\tau) \\ v(\tau) - v_R(\tau) \\ \varphi(\tau) - \varphi_R(\tau) \\ \eta(\tau) - \eta_R(\tau) \\ w(\tau) - w_R(\tau) \end{pmatrix} \right| \\ & \leq C \left| \begin{pmatrix} x(\tau_0) - x_R(\tau_0) \\ v(\tau_0) - v_R(\tau_0) \\ \varphi(\tau_0) - \varphi_R(\tau_0) \\ \eta(\tau_0) - \eta_R(\tau_0) \\ w(\tau_0) - w_R(\tau_0) \end{pmatrix} \right| e^{-\Lambda(\tau - \tau_0)}, \\ & \tau > \tau_0. \end{aligned} \quad (76)$$

Here  $\Lambda > 0$  can be selected as any constant satisfying

$$\max_{j \in [1, 2f], (x, v, \varphi) \in \mathcal{D}_0} \operatorname{Re} \lambda_j(x, v, \varphi) < -\Lambda < 0,$$

with  $\lambda_j(x, v, \varphi)$ ,  $j = 1, \dots, 2f$ , denoting the eigenvalues of the Jacobian  $J$ , or equivalently, of the associated linear system (75). The constant  $C > 0$  depends on  $\Lambda$  but is independent of the choice of the fiber base point  $p$  and the times  $\tau$  and  $\tau_0$ .

By the form of system (68), we have  $|\varphi(\tau) - \varphi_R(\tau)| = |\varphi(\tau_0) - \varphi_R(\tau_0)|$ . This is only consistent with (76), if  $\varphi(\tau_0) \equiv \varphi_R(\tau_0)$ , which implies that the fibers  $f^s(p)$  are necessarily flat (i.e., constant) in the coordinate  $\varphi$ . Using this fact in (76) and passing back to the original coordinates gives

$$\begin{aligned} & \left| \begin{pmatrix} x(t) - x_R(t) \\ \dot{x}(t) - \dot{x}_R(t) \\ \frac{1}{\epsilon}y(t) - \frac{1}{\epsilon}y_R(t) \\ \dot{y}(t) - \dot{y}_R(t) \end{pmatrix} \right| \\ & \leq C \left| \begin{pmatrix} x(t_0) - x_R(t_0) \\ \dot{x}(t_0) - \dot{x}_R(t_0) \\ \frac{1}{\epsilon}y(t_0) - \frac{1}{\epsilon}y_R(t_0) \\ \dot{y}(t_0) - \dot{y}_R(t_0) \end{pmatrix} \right| e^{-\frac{\Lambda}{\epsilon}(t - t_0)}, \quad \tau > \tau_0. \end{aligned}$$

Along the reduced flow on the slow manifold  $\mathcal{M}_\epsilon$ , the  $(y, \dot{y})$  variables are enslaved to the  $(x, v, t)$  variables; thus, we can further rewrite this last inequality as

$$\begin{aligned} & \left| \begin{pmatrix} x(t) - x_R(t) \\ \dot{x}(t) - \dot{x}_R(t) \\ \frac{1}{\epsilon}y(t) - G_\epsilon(x_R(t), \dot{x}_R(t), t) \\ \dot{y}(t) - \epsilon H_\epsilon(x_R(t), \dot{x}_R(t), t) \end{pmatrix} \right| \\ & \leq C \left| \begin{pmatrix} x(t_0) - x_R(t_0) \\ \dot{x}(t_0) - \dot{x}_R(t_0) \\ \frac{1}{\epsilon}y(t_0) - G_\epsilon(x_R(t_0), \dot{x}_R(t_0), t) \\ \dot{y}(t_0) - \epsilon H_\epsilon(x_R(t_0), \dot{x}_R(t_0), t) \end{pmatrix} \right| e^{-\frac{\Lambda}{\epsilon}(t - t_0)}, \\ & \tau > \tau_0. \end{aligned}$$

Applying the triangle inequality to the left-hand side and using the definition of  $G_\epsilon$  and  $H_\epsilon$  on the right-hand side of this inequality proves formula (21).

The validity of requirements (R1) and (R2)

First, the persistence of inflowing, normally attracting, compact invariant manifolds with boundary (cf. Fenichel [7]) together with statement (ii) of the Theorem prove that requirement (R1) is satisfied.

Second, formula (21) shows that solutions decay to the slow manifold  $\mathcal{M}_\epsilon(t)$  at an exponential rate of at least by  $-\Lambda/\epsilon$ . In contrast, any possible exponential attraction rate generated along  $\mathcal{M}_\epsilon(t)$  may at most have an exponent of the order  $-K + \mathcal{O}(\epsilon)$  for some constant  $K > 0$ . This follows because Eq. (18) is  $\epsilon$ -independent at leading order, and its higher-order terms are smooth in  $\epsilon$ . For small enough epsilon, we have

$$-\Lambda/\epsilon \ll -K + \mathcal{O}(\epsilon),$$

and hence the transverse decay rates to the manifold are much larger than any possible tangential decay rate along the manifold. This proves that requirement (R2) holds for  $\mathcal{M}_\epsilon(t)$  for  $\epsilon > 0$  small enough, completing the proof of statement (i) of the Theorem.

## Appendix 2: Proof of Proposition 1

We start by noting that, as a consequence of assumption (30), the graph

$$\eta = G_0(x, t)$$

of the critical manifold  $\mathcal{M}_0$  depends only on the slow positions  $x$  and the time  $t$ . Near the unperturbed equilibrium,  $\mathcal{M}_0(t)$  can therefore be approximated by its Taylor expansion with respect to  $x$ . Specifically, we have

$$\begin{aligned} \eta &= G_0(x, t) \\ &= G_0(0, t) + \partial_x G_0(0, t)x \\ &\quad + \frac{1}{2} \left( \partial_{xx}^2 G_0(0, t)x \right) x + \mathcal{O}(|x|^3). \end{aligned} \quad (77)$$

Differentiation of the implicit equation  $P_2(x, G_0(x, t), 0, t; 0) = 0$  with respect to  $x$  gives

$$\partial_x P_2 + \partial_\eta P_2 \partial_x G_0 = 0. \quad (78)$$

Substitution of (77) into (78) and setting  $x = 0$  yields

$$\partial_x G_0(0, t) = - \left[ \partial_\eta P_2 \right]^{-1} \partial_x P_2 \Big|_{x=0, \eta=G(0,t), \dot{y}=0, \epsilon=0},$$

where the inverse of  $\partial_\eta P_2(x, G_0(x, t), 0, t; 0)$  is guaranteed to exist by assumption (A3). Differentiating (78) once more in  $x$  gives

$$\begin{aligned} \partial_{xx}^2 P_2 + \left( 2\partial_{x\eta}^2 P_2 + \partial_{\eta\eta}^2 P_2 \partial_x G_0 \right) \partial_x G_0 \\ + \partial_\eta P_2 \partial_x^2 G_0 = 0, \end{aligned}$$

enabling us to express the three-tensor  $\partial_{xx}^2 G_0(0, t)$  as

$$\begin{aligned} \partial_{xx}^2 G_0(0, t) &= - \left[ \partial_\eta P_2 \right]^{-1} \\ &\quad \times \left[ \partial_{xx}^2 P_2 + \left( 2\partial_{x\eta}^2 P_2 + \partial_{\eta\eta}^2 P_2 \partial_x G_0 \right) \partial_x G_0 \right] \Big|_{x=0, \eta=G(0,t), \dot{y}=0, \epsilon=0}. \end{aligned} \quad (79)$$

Therefore, with the help of formulas (30), the critical manifold  $\mathcal{M}_0$  can be written near the origin as a smooth, codimension-2  $f$  graph of the form

$$\begin{aligned} \mathcal{M}_0(t) = \{ (x, \dot{x}, \eta, \dot{y}, t) \in \mathcal{P} : \eta = G_0(x, t) = \Gamma(t) \\ + \Phi(t)x + (\Theta(t)x)x + \mathcal{O}(|x|^3), \dot{y} = 0 \}, \end{aligned} \quad (80)$$

where

$$\begin{aligned} P_2(0, \Gamma(t), 0, t; 0) &= 0, \\ \Phi(t) &= - \left[ \partial_\eta P_2 \right]^{-1} \partial_x P_2 \Big|_{x=0, \eta=\Gamma(t), \dot{y}=0, \epsilon=0}, \end{aligned}$$

$$\begin{aligned} \Theta(t) &= -\frac{1}{2} \left[ \partial_\eta P_2 \right]^{-1} \left[ \partial_{xx}^2 P_2 \right. \\ &\quad \left. + \left( 2\partial_{x\eta}^2 P_2 + \partial_{\eta\eta}^2 P_2 \Phi(t) \right) \Phi(t) \right] \Big|_{x=0, \eta=\Gamma(t), \dot{y}=0, \epsilon=0}, \end{aligned} \quad (81)$$

as claimed in statement (i) of the Proposition. These expressions in (81) can then be used in the reduced-order models (18)–(19) to obtain more specific local approximations to the reduced dynamics, in case a global expression for the critical manifold is not explicitly available. Specifically, (18) can be localized near  $x = 0$  as

$$\begin{aligned} \ddot{x} - P_1(x, \dot{x}, [\Gamma(t) + \Phi(t)x + (\Theta(t)x)x], 0, t; 0) \\ + \mathcal{O}(\epsilon, |x|^3) = 0. \end{aligned} \quad (82)$$

Under the further assumptions in statement (ii) of the Proposition, we have the following simplifications in formulas (81):

$$\begin{aligned} \Gamma(t) &\equiv 0, \quad \Phi(t) \equiv 0, \\ \Theta(t) &\equiv -\frac{1}{2} \left[ \partial_\eta P_2(0, 0, 0; 0) \right]^{-1} \partial_{xx}^2 P_2(0, 0, 0; 0). \end{aligned} \quad (83)$$

Substituting these quantities into (82) and truncating the expression for  $\mathcal{M}_0(t)$  at linear and then at quadratic order proves the leading-order forms of the reduced equations in statements (iii) and (iv) of the Proposition, respectively. To obtain the order of the error terms in these equations, note that if  $x$  and  $y$  are modal coordinates of the linearized system, then we have

$$\begin{aligned} P_1(x, \dot{x}, \eta, \dot{y}, t; \epsilon) &= P_1(x, \dot{x}, \eta, 0, t; 0) + \mathcal{O}(\epsilon) \\ &= P_1(x, \dot{x}, 0, 0, t; 0) + \mathcal{O}(|x| |\eta|) + \mathcal{O}(\epsilon). \end{aligned} \quad (84)$$

Substitution of  $\eta = 0 + \mathcal{O}(|x|^2)$  and  $\eta = (\Theta(t)x)x + \mathcal{O}(|x|^3)$ , respectively, into the  $\mathcal{O}(|x| |\eta|)$  term in (84) then proves the order of the higher-order terms, as listed in statements (iii) and (iv) of the Proposition.

## Appendix 3: Details for Example 8

For the system

$$\begin{aligned} \ddot{x} + \left( c_1 + \mu_1 x^2 \right) \dot{x} + k_1 x + axy + bx^3 &= 0, \quad x \in \mathbb{R}, \\ \ddot{y} + c_2 \dot{y} + k_2 y + cx^2 &= 0, \quad y \in \mathbb{R}, \end{aligned} \quad (85)$$

we consider reduction by static condensation via the linear change of variables

$$\begin{pmatrix} x \\ y \end{pmatrix} = U \hat{x}, \quad U = \begin{pmatrix} 1 \\ 0 \end{pmatrix}, \quad \hat{x} \in \mathbb{R}. \quad (86)$$

Dropping the tilde from  $\hat{x}$  and substituting  $y = 0$  from (86) into the first equation of (44) gives statically condensed model (45).

Next, applying the idea of modal derivatives, we seek a quadratic invariant manifold of form (32), with the coefficients computed in the unscaled variables as

$$\begin{aligned}\Phi &= 0, \\ \Theta &= -\frac{1}{2} \left[ \partial_y \left( c_2 \dot{y} + k_2 y + c x^2 \right) \right]^{-1} \\ &\quad \times \left[ \partial_{xx}^2 \left( c_2 \dot{y} + k_2 y + c x^2 \right) \right] \Big|_{x=0, y=0, \dot{y}=0} \\ &= -\frac{c}{k_2}.\end{aligned}\quad (87)$$

Substitution of  $y = \Theta x^2$  into the first equation of (44) gives the modal-derivatives-based reduced-order model (46), representing only a slight correction to (45) at cubic order. All this appears reasonable at this point, with the statically condensed system (45) offering a leading-order model that is subsequently refined at cubic order by the modal derivatives approach in (46).

At the same time, there exists a slow spectral submanifold (SSM), the unique smoothest, nonlinear continuation of the  $y = 0$  modal subspace of the equilibrium. This unique, two-dimensional analytic invariant manifold is tangent to the modal subspace of the  $x$ -degree of freedom at the origin (cf. Haller and Ponsioen [15]). The slow SSM, therefore, can locally be written as a two-dimensional invariant graph  $(y, \dot{y}) = (g_1(x, \dot{x}), g_2(x, \dot{x})) = \mathcal{O}(x^2, x\dot{x}, \dot{x}^2)$  over  $(x, \dot{x})$ , as originally envisioned by Shaw and Pierre [25]. Differentiating the general form

$$y = g_1(x, \dot{x}) = \alpha x^2 + \beta x \dot{x} + \gamma \dot{x}^2 + \mathcal{O}(3) \quad (88)$$

of such an invariant graph twice in time, with  $\ddot{x}$  substituted from the first equation of system (44), we obtain

$$\begin{aligned}\ddot{y} &= -k_1(2\alpha - 2\gamma k_1 - \beta c_1)x^2 \\ &\quad - [2\beta k_1 + c_1(2\alpha - 2\gamma k_1 - \beta c_1) \\ &\quad + 2(\beta - 2\gamma c_1)k_1]x\dot{x} \\ &\quad + [(2\alpha - 2\gamma k_1 - \beta c_1) - 2c_1(\beta - 2\gamma c_1)]\dot{x}^2 \\ &\quad + \mathcal{O}(3).\end{aligned}$$

A comparison of this differential equation with the second equation of system (44), with  $y$  and  $\dot{y}$  substituted from (88), leads to the linear system of algebraic equations

$$\begin{pmatrix} k_2 - 2k_1 & k_1(c_1 - c_2) & 2k_1^2 \\ 2(c_2 - c_1) & k_2 - 4k_1 + c_1^2 - c_1 c_2 & 2k_1(3c_1 - c_2) \\ 2 & c_2 - 3c_1 & k_2 - 2k_1 + 4c_1^2 - 2c_1 c_2 \end{pmatrix} \begin{pmatrix} \alpha \\ \beta \\ \gamma \end{pmatrix} = - \begin{pmatrix} c \\ 0 \\ 0 \end{pmatrix}$$

for the unknown coefficients  $\alpha$ ,  $\beta$  and  $\gamma$  in expression (88) of the slow SSM. The solution of this system of equations is given by

$$\begin{aligned}\alpha &= -\frac{c}{D} (4c_1^4 - 6c_1^3 c_2 + 2c_1^2 c_2^2 + 5c_1^2 k_2 - c_1 c_2 (2k_1 + 3k_2) \\ &\quad + 2c_2^2 k_1 + 8k_1^2 - 6k_1 k_2 + k_2^2), \\ \beta &= -\frac{2c}{D} (4c_1 k_1 + k_2(c_1 - c_2) + 2c_1 c_2^2 - 6c_1^2 c_2 + 4c_1^3), \\ \gamma &= -\frac{2c}{D} (2c_1^2 - 3c_1 c_2 + c_2^2 + 4k_1 - k_2),\end{aligned}\quad (89)$$

with

$$\begin{aligned}D &= (c_1^2 - c_1 c_2 + k_2) (4c_1^2 k_2 - 8c_1 c_2 k_1 - 2c_1 c_2 k_2 \\ &\quad + 4c_2^2 k_1 + 16k_1^2 - 8k_1 k_2 + k_2^2).\end{aligned}\quad (90)$$

With these coefficients, substitution of (88) into the first equation of system (44) gives the exact reduced system on the slow SSM, up to cubic order, in the form

$$\begin{aligned}\ddot{x} &+ [c_1 + (\mu_1 + a\beta)x^2]\dot{x} + (k_1 + a\gamma\dot{x}^2)x \\ &+ (b + a\alpha)x^3 + \mathcal{O}(4) = 0.\end{aligned}$$

Substitution of formulas (89) into this last equation gives final form (47) of the exact reduced model on the SSM.

#### Appendix 4: Details for Sect. 6.1

For the parameter range described by scalings (59), we take the  $\epsilon \rightarrow 0$  limit in the expressions for  $P_1$  and  $P_2$  in (57)–(58). We then obtain

$$\begin{aligned}P_1(x, v, \eta, w, t; 0) &= \begin{bmatrix} p_1^0 \\ p_2^0 \end{bmatrix}, \\ p_1^0 &= \frac{1+\beta}{\delta^2} \left( -\mu_p v_\gamma - \delta^2 \sin x_\gamma + \delta^2 G_p(t) \right. \\ &\quad + \frac{\delta \sin x_\gamma}{1+\beta} [\beta \delta \cos x_\gamma v_\gamma^2 - \mu_h w - \Omega_h^2 \eta - \alpha_h \eta^3 \\ &\quad + (1+\beta)\delta + F_h(t)\delta - F_p(t)\delta \sin x_\gamma] \Big) \\ &\quad - \frac{\phi}{\delta} \cos x_\gamma \left( \beta \frac{\delta}{\phi} \sin x_\gamma v_\gamma^2 \right.\end{aligned}\quad (91)$$

$$\begin{aligned}
& -\mu_d v_d - \Omega_d^2 (1 + x_d) Q^0(x_d) + F_d(t) \frac{\delta}{\phi} \\
& + F_p(t) \frac{\delta}{\phi} \cos x_\gamma \Big), \\
p_2^0 = & -\frac{\beta}{\delta \phi} \cos x_\gamma \Big( -\mu_p v_\gamma - \delta^2 \sin x_\gamma + \delta^2 G_p(t) \\
& + \frac{\delta \sin x_\gamma}{1 + \beta} [\beta \delta \cos x_\gamma v_\gamma^2 - \mu_h w - \Omega_h^2 \eta - \alpha_h \eta^3 \\
& + (1 + \beta) \delta + F_h(t) \delta - F_p(t) \delta \sin x_\gamma] \Big) \\
& + \frac{1}{1 + \beta} (1 + \beta \cos^2 x_\gamma) \Big( \beta \frac{\delta}{\phi} \sin x_\gamma v_\gamma^2 \\
& - \mu_d v_d - \Omega_d^2 (1 + x_d) Q^0(x_d) + F_d(t) \frac{\delta}{\phi} \\
& + F_p(t) \frac{\delta}{\phi} \cos x_\gamma \Big), \tag{92}
\end{aligned}$$

$$\begin{aligned}
P_2(x, v, \eta, w, t; 0) = & \left( \frac{1 + \beta \sin^2 x_\gamma}{1 + \beta} \right) \Big( \beta \delta \cos x_\gamma v_\gamma^2 \\
& - \mu_h w - \Omega_h^2 \eta - \alpha_h \eta^3 + (1 + \beta) \delta \\
& + F_h(t) \delta - F_p(t) \delta \sin x_\gamma \\
& + \frac{(1 + \beta) \beta \sin x_\gamma}{\delta (1 + \beta \sin^2 x_\gamma)} [-\mu_p v_\gamma - \delta^2 \sin x_\gamma + \delta^2 G_p(t)] \\
& - \frac{\beta \phi \sin x_\gamma \cos x_\gamma}{1 + \beta \sin^2 x_\gamma} \Big[ \beta \frac{\delta}{\phi} \sin x_\gamma v_\gamma^2 \\
& - \mu_d v_d - \Omega_d^2 (1 + x_d) Q^0(x_d) + F_d(t) \frac{\delta}{\phi} \\
& + F_p(t) \frac{\delta}{\phi} \cos x_\gamma \Big] \Big),
\end{aligned}$$

where  $Q^0(x_d)$  is defined as

$$Q^0(x_d) = \left( 1 - \frac{1}{1 + x_d} \right), \quad x_d > -1.$$

We observe that both  $P_1$  and  $P_2$  continue to be smooth in  $\epsilon$  at the  $\epsilon = 0$  limit, thereby satisfying assumption (A1).

For the critical manifold defined through the relationship  $\eta = G_0(x, v, t)$  in assumption (A2), we have the equation

$$\begin{aligned}
P_2(x, v, \eta, 0, t; 0) = 0 & \iff \Omega_h^2 \eta \\
& + \alpha_h \eta^3 = T(x, v, t),
\end{aligned}$$

where

$$\begin{aligned}
T(x, v, t) = & \beta \delta \cos x_\gamma v_\gamma^2 + (1 + \beta) \delta \\
& + F_h(t) \delta - F_p(t) \delta \sin x_\gamma + \frac{(1 + \beta) \beta \sin x_\gamma}{\delta (1 + \beta \sin^2 x_\gamma)}
\end{aligned}$$

$$\begin{aligned}
& \times \left[ -\mu_p v_\gamma - \delta^2 \sin x_\gamma + \delta^2 G_p(t) \right] \\
& - \frac{\beta \phi \sin x_\gamma \cos x_\gamma}{1 + \beta \sin^2 x_\gamma} \left[ \beta \frac{\delta}{\phi} \sin x_\gamma v_\gamma^2 - \mu_d v_d \right. \\
& \left. - \Omega_d^2 (1 + x_d) Q^0(x_d) + F_d(t) \frac{\delta}{\phi} + F_p(t) \frac{\delta}{\phi} \cos x_\gamma \right].
\end{aligned}$$

Using the cubic formula, the real root of this equation can be expressed explicitly as

$$\begin{aligned}
\eta = & G_0(x, v, t) \\
= & \sqrt[3]{\frac{T(x, v, t)}{2\alpha_h} + \sqrt{\frac{T^2(x, v, t)}{4\alpha_h^2} + \frac{\Omega_h^6}{27\alpha_h^3}}} \\
& - \sqrt[3]{-\frac{T(x, v, t)}{2\alpha_h} + \sqrt{\frac{T^2(x, v, t)}{4\alpha_h^2} + \frac{\Omega_h^6}{27\alpha_h^3}}},
\end{aligned}$$

assuming that  $\Omega_h^2$  and  $\alpha_h$  are greater than zero.

Oscillatory system (9) determining the stability of the critical manifold takes the specific form

$$\begin{aligned}
A(x, v, t) = & -\partial_w P_2(x, v, G_0(x, v, t), 0, t; 0) \\
= & \left( \frac{1 + \beta \sin^2 x_\gamma}{1 + \beta} \right) \mu_h, \tag{93}
\end{aligned}$$

$$\begin{aligned}
B(x, v, t) = & -\partial_\eta P_2(x, v, G_0(x, v, t), 0, t; 0) \\
= & \left( \frac{1 + \beta \sin^2 x_\gamma}{1 + \beta} \right) (\Omega_h^2 + 3\alpha_h G_0^2(x, v, t)). \tag{94}
\end{aligned}$$

The equilibrium solution of the unforced linear oscillatory system (9) is, therefore, always asymptotically stable, given that

$$\mu_h > 0, \quad \beta > 0, \quad \Omega_h^2 > 0, \quad \alpha_h > 0.$$

We conclude that assumptions (A1)–(A3) hold, and hence a global reduced-order model (18) exists over the slow variables in the specific form

$$\ddot{x} = \left[ \frac{1 + \beta}{\delta^2 (1 + \beta \sin^2 x_\gamma)} \mathcal{A} - \frac{\phi \cos x_\gamma}{\delta (1 + \beta \sin^2 x_\gamma)} \mathcal{B} \right] + \mathcal{O}(\epsilon),$$

where

$$\mathcal{A}(x_\gamma, \dot{x}_\gamma) = -\mu_p \dot{x}_\gamma - \delta^2 \sin x_\gamma + \delta^2 G_p(t),$$

$$\mathcal{B}(x_\gamma, x_d, \dot{x}_\gamma) = \beta \frac{\delta}{\phi} \sin x_\gamma \dot{x}_\gamma^2 - \mu_d \dot{x}_\gamma - \Omega_d^2 x_d \\ + F_d(t) \frac{\delta}{\phi} + F_p(t) \frac{\delta}{\phi} \cos x_\gamma.$$

Scaling back to the original time and substituting the physical parameters back into the non-dimensionalized equations, we obtain that the exact reduced-order model on the slow manifold of form (60)–(61).

$$M(q, t; \epsilon) = \begin{pmatrix} \Delta^2 & -\Delta \sin x & \Delta \cos x \\ -\beta \Delta \sin x & 1 + \beta & 0 \\ \beta \Delta \cos x & 0 & 1 + \beta \end{pmatrix}, \\ F(q, \dot{q}, t; \epsilon) = \begin{pmatrix} -\pi_p \dot{x} - \Delta^2 \sin x + \Delta^2 G_p(t) \\ \beta \Delta \cos x \dot{x}^2 - \pi_h \dot{y}_h - q_h \epsilon \frac{y_h}{\epsilon} - q_d \epsilon \frac{y_h}{\epsilon} Q\left(\frac{y_d}{\epsilon}, \frac{y_h}{\epsilon}\right) - a_h \epsilon^3 \left(\frac{y_h}{\epsilon}\right)^3 \\ + (1 + \beta) \Delta + F_h(t) \Delta - F_p(t) \Delta \sin x \\ \beta \Delta \sin x \dot{x}^2 - \pi_d \dot{y}_d - q_d \left(1 + \epsilon \frac{y_d}{\epsilon}\right) Q\left(\frac{y_d}{\epsilon}, \frac{y_h}{\epsilon}\right) + F_d(t) \Delta + F_p(t) \Delta \cos x \end{pmatrix},$$

## Appendix 5: Details for Sect. 6.2

Here we verify assumptions (A1)–(A3) in detail for the fast–fast–slow setting treated in Sect. 6.2. To make the horizontal spring stiff, we choose its length as  $D = L$ , so that the original equations of motion (54) now become

$$ml^2 \ddot{\gamma} - ml \sin \gamma \ddot{h} + ml \cos \gamma \ddot{d} + c_p \dot{\gamma} \\ + mgl \sin \gamma = f_p(t)l, \\ (M + m) \ddot{h} - ml \sin \gamma \ddot{\gamma} - ml \cos \gamma \dot{\gamma}^2 + C_h \dot{h} \\ + K_h h + K_d Q(d, h)h + \Gamma_h h^3 = (M + m)g \\ + f_h(t) - f_p(t) \sin \gamma, \\ (M + m) \ddot{d} + ml \cos \gamma \ddot{\gamma} - ml \sin \gamma \dot{\gamma}^2 + C_d \dot{d} \\ + K_d (L + d) Q(d, h) = f_d(t) + f_p(t) \cos \gamma,$$

with

$$Q(d, h) = \left(1 - \frac{L}{\sqrt{(L + d)^2 + h^2}}\right). \quad (95)$$

The linearized oscillation frequencies of the uncoupled springs and pendulum remain the same as in (55). We adopt the same scaling as in Sect. 6.1, except that we now scale the  $d$  coordinate with the unstretched length  $L$  of the vertical spring. Denoting differentiation with respect to the new time  $\tilde{t}$  still by a dot, then dropping all the tildes, we obtain the non-dimensionalized equations of motions

$$\Delta^2 \ddot{\gamma} - \Delta \sin \gamma \ddot{h} + \Delta \cos \gamma \ddot{d} + \pi_p \dot{\gamma} \\ + \Delta^2 \sin \gamma = \Delta^2 G_p(t), \\ (1 + \beta) \ddot{h} - \beta \Delta \sin \gamma \ddot{\gamma} - \beta \Delta \cos \gamma \dot{\gamma}^2 + \pi_h \dot{h} + q_h h \\ + q_d h Q(d, h) + a_h h^3 = (1 + \beta) \Delta + F_h(t) \Delta \\ - F_p(t) \Delta \sin \gamma, \\ (1 + \beta) \ddot{d} + \beta \Delta \cos \gamma \ddot{\gamma} - \beta \Delta \sin \gamma \dot{\gamma}^2 + \pi_d \dot{d} \\ + q_d (1 + d) Q(d, h) = F_d(t) \Delta + F_p(t) \Delta \cos \gamma.$$

In the notation used for system (1), we now have

with the parameter  $\epsilon > 0$  yet to be determined based on the assumptions of the SFD approach. Note that the mass matrix above is not symmetric due to the scalings we have employed, but it is, nevertheless, nonsingular, as we generally assume in this paper.

With the above quantities at hand, we obtain the modified mass matrices  $M_i$  and the forcing terms  $Q_i$  defined in (5) in the specific form

$$M_1 = M_{11} - M_{12} M_{22}^{-1} M_{21} = \frac{\Delta^2}{1 + \beta}, \\ M_2 = M_{22} - M_{21} M_{11}^{-1} M_{12} \\ = \begin{pmatrix} 1 + \beta \cos^2 x & \beta \sin x \cos x \\ \beta \sin x \cos x & 1 + \beta \sin^2 x \end{pmatrix}, \\ Q_1 = F_1 - M_{12} M_{22}^{-1} F_2 = -\pi_p \dot{x} - \Delta^2 \sin x \\ + \Delta^2 G_p(t) + \frac{\Delta}{1 + \beta} \sin x \left[ \beta \Delta \cos x \dot{x}^2 - \pi_h \dot{y}_h \right. \\ \left. - q_h \epsilon \frac{y_h}{\epsilon} - q_d \epsilon \frac{y_h}{\epsilon} Q\left(\frac{y_d}{\epsilon}, \frac{y_h}{\epsilon}\right) - a_h \epsilon^3 \left(\frac{y_h}{\epsilon}\right)^3 \right. \\ \left. + (1 + \beta) \Delta + F_h(t) \Delta - F_p(t) \Delta \sin x \right] \\ - \frac{\Delta}{1 + \beta} \cos x \left[ \beta \Delta \sin x \dot{x}^2 - \pi_d \dot{y}_d \right. \\ \left. - q_d \left(1 + \epsilon \frac{y_d}{\epsilon}\right) Q\left(\frac{y_d}{\epsilon}, \frac{y_h}{\epsilon}\right) + F_d(t) \Delta \right. \\ \left. + F_p(t) \Delta \cos x \right],$$

$$Q_2 = F_2 - M_{21} M_{11}^{-1} F_1 = \begin{bmatrix} \beta \Delta \cos x \dot{x}^2 - \pi_h \dot{y}_h - q_h \epsilon \frac{y_h}{\epsilon} - q_d \epsilon \frac{y_h}{\epsilon} Q(\frac{y_d}{\epsilon}, \frac{y_h}{\epsilon}) - a_h \epsilon^3 (\frac{y_h}{\epsilon})^3 + (1 + \beta) \Delta \\ + F_h(t) \Delta - F_p(t) \Delta \sin x - \frac{\beta}{\Delta} \pi_p \sin x \dot{x} - \beta \Delta \sin^2 x + \beta \Delta \sin x G_p(t) \\ \beta \Delta \sin x \dot{x}^2 - \pi_d \dot{y}_d - q_d (1 + \epsilon \frac{y_d}{\epsilon}) Q(\frac{y_d}{\epsilon}, \frac{y_h}{\epsilon}) + F_d(t) \Delta + F_p(t) \Delta \cos x \\ + \frac{\beta}{\Delta} \pi_p \cos x \dot{x} + \beta \Delta \sin x \cos x - \beta \Delta \cos x G_p(t) \end{bmatrix}.$$

We therefore obtain

$$P_1(x, v, \eta, w, t; \epsilon) = \frac{1 + \beta}{\Delta^2} \left[ -\pi_p v - \Delta^2 \sin x \right. \\ \left. + \Delta^2 G_p(t) + \frac{\Delta}{1 + \beta} \sin x \left[ \beta \Delta \cos x v^2 - \pi_h w_h \right. \right. \\ \left. - q_h \epsilon \eta_h - q_d \epsilon \eta_h Q(\eta_d, \eta_h) - a_h \epsilon^3 \eta_h^3 \right. \\ \left. + (1 + \beta) \Delta + F_h(t) \Delta - F_p(t) \Delta \sin x \right] \\ \left. - \frac{\Delta}{1 + \beta} \cos x \left[ \beta \Delta \sin x v^2 - \pi_d w_d \right. \right. \\ \left. - q_d (1 + \epsilon \eta_d) Q(\eta_d, \eta_h) + F_d(t) \Delta + F_p(t) \Delta \cos x \right] \Bigg],$$

at present we have  $\lim_{\epsilon \rightarrow 0} P_2(x, v, \eta, w, t; \epsilon) \equiv 0$ , these assumptions will not hold. We can only satisfy (A1)–(A3) by making the system parameters appropriate functions of  $\epsilon$ .

With the parameter choices listed in (62), we have

$$P_1(x, v, \eta, w, t; \epsilon) = \frac{1 + \beta}{\delta^2} \left[ -\mu_p v - \delta^2 \sin x \right. \\ \left. + \delta^2 G_p(t) + \frac{\delta}{1 + \beta} \sin x \left[ \beta \delta \cos x v^2 - \mu_h w_h \right. \right. \\ \left. - \Omega_h^2 \eta_h - \Omega_d^2 \eta_h Q(\eta_d, \eta_h) - \alpha_h \eta_h^3 + (1 + \beta) \delta \right. \\ \left. + F_h(t) \delta - F_p(t) \delta \sin x \right]$$

$$P_2(x, v, \eta, w, t; \epsilon) = \epsilon M_2^{-1} \begin{bmatrix} \beta \Delta \cos x v^2 - \pi_h w_h - q_h \epsilon \eta_h - q_d \epsilon \eta_h Q(\eta_d, \eta_h) - a_h \epsilon^3 \eta_h^3 + (1 + \beta) \Delta \\ + F_h(t) \Delta - F_p(t) \Delta \sin x - \frac{\beta}{\Delta} \pi_p \sin x v - \beta \Delta \sin^2 x + \beta \Delta \sin x G_p(t) \\ \beta \Delta \sin x v^2 - \pi_d w_d - q_d (1 + \epsilon \eta_d) Q(\eta_d, \eta_h) + F_d(t) \Delta + F_p(t) \Delta \cos x \\ + \frac{\beta}{\Delta} \pi_p \cos x v + \beta \Delta \sin x \cos x - \beta \Delta \cos x G_p(t) \end{bmatrix},$$

where  $M_2^{-1}$  is equal to

$$M_2^{-1} = \frac{1}{1 + \beta} \begin{bmatrix} 1 + \beta \sin^2 x & -\beta \sin x \cos x \\ -\beta \sin x \cos x & 1 + \beta \cos^2 x \end{bmatrix}.$$

$$- \frac{\delta}{1 + \beta} \cos x \left[ \beta \delta \sin x v^2 - \mu_d w_d - \frac{\Omega_d^2}{\epsilon} (1 + \epsilon \eta_d) \right. \\ \left. \times Q(\eta_d, \eta_h) + F_d(t) \delta + F_p(t) \delta \cos x \right] \Bigg],$$

$$P_2(x, v, \eta, w, t; \epsilon) = M_2^{-1} \begin{bmatrix} \beta \delta \cos x v^2 - \mu_h w_h - \Omega_h^2 \eta_h - \Omega_d^2 \eta_h Q(\eta_d, \eta_h) - \alpha_h \eta_h^3 + (1 + \beta) \delta \\ + F_h(t) \delta - F_p(t) \delta \sin x - \frac{\beta}{\delta} \mu_p \sin x v - \beta \delta \sin^2 x + \beta \delta \sin x G_p(t) \\ \beta \delta \sin x v^2 - \mu_d w_d - \frac{\Omega_d^2}{\epsilon} (1 + \epsilon \eta_d) Q(\eta_d, \eta_h) + F_d(t) \delta + F_p(t) \delta \cos x \\ + \frac{\beta}{\delta} \mu_p \cos x v + \beta \delta \sin x \cos x - \beta \delta \cos x G_p(t) \end{bmatrix}.$$

where  $M_2^{-1}$  remains unchanged.

Recall that  $\epsilon > 0$  has been a completely arbitrary small parameter so far. We now need to define  $\epsilon$  in a way that assumptions (A1)–(A3) are satisfied. Since



Noting that

$$\begin{aligned}
 \lim_{\epsilon \rightarrow 0} \frac{\Omega_d^2}{\epsilon} (1 + \epsilon \eta_d) \mathcal{Q}(\eta_d, \eta_h) &= \lim_{\epsilon \rightarrow 0} \frac{\Omega_d^2}{\epsilon} (1 + \epsilon \eta_d) \left( 1 - \frac{1}{\sqrt{(1 + \epsilon \eta_d)^2 + (\epsilon \eta_h)^2}} \right) \\
 &= \lim_{\epsilon \rightarrow 0} \frac{\Omega_d^2 (1 + \epsilon \eta_d) \left( \sqrt{(1 + \epsilon \eta_d)^2 + (\epsilon \eta_h)^2} - 1 \right)}{\epsilon \sqrt{(1 + \epsilon \eta_d)^2 + (\epsilon \eta_h)^2}} = \lim_{\epsilon \rightarrow 0} \frac{f(\epsilon)}{g(\epsilon)} = \lim_{\epsilon \rightarrow 0} \frac{\partial_\epsilon f(\epsilon)}{\partial_\epsilon g(\epsilon)} \\
 &= \lim_{\epsilon \rightarrow 0} \frac{\Omega_d^2 \eta_d \left( \sqrt{(1 + \epsilon \eta_d)^2 + (\epsilon \eta_h)^2} - 1 \right) + \Omega_d^2 (1 + \epsilon \eta_d) \left( ((1 + \epsilon \eta_d) \eta_d + \epsilon \eta_h^2) ((1 + \epsilon \eta_d)^2 + (\epsilon \eta_h)^2)^{-\frac{1}{2}} \right)}{\sqrt{(1 + \epsilon \eta_d)^2 + (\epsilon \eta_h)^2} + \epsilon ((1 + \epsilon \eta_d) \eta_d + \epsilon \eta_h^2) ((1 + \epsilon \eta_d)^2 + (\epsilon \eta_h)^2)^{-\frac{1}{2}}} \\
 &= \Omega_d^2 \eta_d,
 \end{aligned}$$

we conclude that both  $P_1$  and  $P_2$  continue to be smooth in  $\epsilon$  at the  $\epsilon = 0$  limit, thereby satisfying assumption (A1).

For the critical manifold defined through the relationship  $\eta = G_0(x, v, t)$  in assumption (A2), we have the equations

$$\begin{aligned}
 \eta_h &= \sqrt[3]{\frac{T_h(x, v, t)}{2\alpha_h} + \sqrt{\frac{T_h^2(x, v, t)}{4\alpha_h^2} + \frac{\Omega_h^6}{27\alpha_h^3}}} \\
 &\quad - \sqrt[3]{-\frac{T_h(x, v, t)}{2\alpha} + \sqrt{\frac{T_h^2(x, v, t)}{4\alpha_h^2} + \frac{\Omega_h^6}{27\alpha_h^3}}}, \\
 \eta_d &= \frac{T_d(x, v, t)}{\Omega_d^2},
 \end{aligned}$$

$$P_2(x, v, \eta, 0, t; 0) = M_2^{-1} \begin{bmatrix} \beta \delta \cos x v^2 - \Omega_h^2 \eta_h - \alpha_h \eta_h^3 + (1 + \beta) \delta + F_h(t) \delta \\ -F_p(t) \delta \sin x - \frac{\beta}{\delta} \mu_p \sin x v - \beta \delta \sin^2 x + \beta \delta \sin x G_p(t) \\ \beta \delta \sin x v^2 - \Omega_d^2 \eta_d + F_d(t) \delta + F_p(t) \delta \cos x \\ + \frac{\beta}{\delta} \mu_p \cos x v + \beta \delta \sin x \cos x - \beta \delta \cos x G_p(t) \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \end{bmatrix}.$$

Since  $M_2^{-1}$  is invertible, the critical manifold can be found by solving the following equations for  $\eta_h$  and  $\eta_d$ :

$$\begin{aligned}
 \Omega_h^2 \eta_h + \alpha_h \eta_h^3 &= T_h(x, v, t) = \beta \delta \cos x v^2 \\
 &\quad + (1 + \beta) \delta + F_h(t) \delta - F_p(t) \delta \sin x \\
 &\quad - \frac{\beta}{\delta} \mu_p \sin x v - \beta \delta \sin^2 x + \beta \delta \sin x G_p(t), \\
 \Omega_d^2 \eta_d &= T_d(x, v, t) = \beta \delta \sin x v^2 + F_d(t) \delta \\
 &\quad + F_p(t) \delta \cos x + \frac{\beta}{\delta} \mu_p \cos x v + \beta \delta \sin x \cos x \\
 &\quad - \beta \delta \cos x G_p(t).
 \end{aligned}$$

The real roots of these two equations can be expressed explicitly as

assuming that  $\Omega_h^2$ ,  $\Omega_d^2$  and  $\alpha_h$  are greater than zero. The stability of this critical manifold is determined by the associated oscillatory system (9), whose coefficient matrices now take the specific form

$$\begin{aligned}
 A(x, v, t) &= -\partial_w P_2(x, v, G_0(x, v, t), 0, t; 0) \\
 &= \frac{1}{1 + \beta} \begin{bmatrix} 1 + \beta \sin^2 x & -\beta \sin x \cos x \\ -\beta \sin x \cos x & 1 + \beta \cos^2 x \end{bmatrix} \begin{bmatrix} \mu_h & 0 \\ 0 & \mu_d \end{bmatrix}, \\
 B(x, v, t) &= -\partial_\eta P_2(x, v, G_0(x, v, t), 0, t; 0) \\
 &= \frac{1}{1 + \beta} \begin{bmatrix} 1 + \beta \sin^2 x & -\beta \sin x \cos x \\ -\beta \sin x \cos x & 1 + \beta \cos^2 x \end{bmatrix} \\
 &\quad \times \begin{bmatrix} \Omega_h^2 + 3\alpha_h \eta_h^2 & 0 \\ 0 & \Omega_d^2 \end{bmatrix}.
 \end{aligned}$$

Consequently, the equilibrium solution of the unforced linear oscillatory system (9) is always asymptotically stable, given that

$$\mu_h > 0, \quad \mu_d > 0, \quad \beta > 0, \quad \Omega_h^2 > 0, \quad \Omega_d^2 > 0, \quad \alpha_h > 0.$$

We conclude that assumptions (A1)–(A3) hold, and hence a global reduced-order model exists over the softer variables  $(x, v, t) \in \mathcal{D}_0 = \mathbb{R} \times \mathbb{R} \times S^1$ .

## References

- Ariel, G., Sanz-Serna, J.M., Tsai, R.: A multiscale technique for finding slow manifolds of stiff mechanical systems. *Multiscale Model. Simul.* **10**, 1180–1203 (2012)
- Arnold, V.I.: *Catastrophe Theory*, 3rd edn. Springer, Berlin (1992)
- Benner, P., Gugercin, S., Willcox, K.: A survey of projection-based model reduction methods for parametric dynamical systems. *SIAM Rev.* **57**, 483–553 (2015)
- Besselink, B., Tabak, U., Lutowska, A., van de Wouw, N., Nijmeijer, H., Rixen, D.J., Hochstenbach, M.E., Schilders, W.H.A.: A comparison of model reduction techniques from structural dynamics, numerical mathematics and systems and control. *J. Sound Vib.* **332**, 4403–4422 (2013)
- Cabr  , P., Fontich, E., de la Llave, R.: The parametrization method for invariant manifolds I: manifolds associated to non-resonant spectral subspaces. *Indiana Univ. Math. J.* **52**, 283–328 (2003)
- Carr, J.: *Applications of Centre Manifold Theory*. Springer, New York (1982)
- Fenichel, N.: Geometric singular perturbation theory for ordinary differential equations. *J. Differ. Equ.* **31**, 53–98 (1979)
- Georgiou, I.T., Bajaj, A.K., Corless, M.: Invariant manifolds and chaotic vibrations in singularly perturbed nonlinear oscillators. *Int. J. Eng. Sci.* **36**, 431–458 (1998)
- Georgiou, I.T., Schwartz, I.B.: The slow invariant manifold of a conservative pendulum–oscillator system. *Int. J. Bifurc. Chaos* **6**, 673–692 (1996)
- Georgiou, I.T., Vakakis, A.F.: An invariant manifold approach for studying waves in a one-dimensional array of non-linear oscillators. *Int. J. Non Linear Mech.* **31**, 871–886 (1996)
- Georgiou, I.T., Corless, M.J., Bajaj, A.K.: Dynamics of nonlinear structures with multiple equilibria: a singular perturbation-invariant manifold approach. *Z. Angew. Math. Phys.* **50**, 892–924 (1999)
- Georgiou, I.T., Schwartz, I.B.: Dynamics of large scale coupled structural/mechanical systems: a singular perturbation/proper orthogonal decomposition approach. *SIAM J. Appl. Math.* **59**, 1178–1207 (1999)
- Geradin, M., Rixen, D.J.: *Mechanical Vibrations: Theory and Application to Structural Dynamics*, 3rd edn. Wiley, London (2015)
- Guckenheimer, J., Holmes, P.J.: *Nonlinear Oscillations, Dynamical Systems and Bifurcations of Vector Fields*. Springer, New York (1983)
- Haller, G., Ponsioen, S.: Nonlinear normal and spectral submanifolds: existence, uniqueness and use in model reduction. *Nonlinear Dyn.* **86**(3), 1493–1534 (2016)
- Idelsohn, S.R., Cardona, A.: A reduction method for nonlinear structural dynamic analysis. *Comput. Methods Appl. Mech. Eng.* **49**(3), 253–279 (1985)
- Jain, S., Tiso, P., Haller, G.: Exact nonlinear model reduction by slow–fast decomposition for a forced von K  rm  n beam, preprint (2016)
- Jones, C.K.R.T.: Geometric singular perturbation theory. In: *Dynamical Systems, Lecture Notes in Mathematics* 1609, pp. 44–11. New York, Springer (2006)
- Kelley, A.F.: Analytic two-dimensional subcenter manifolds for systems with an integral. *Pac. J. Math.* **29**, 335–350 (1969)
- Kristiansen, K.U., Wulff, C.: Exponential estimates of symplectic slow manifolds. *J. Differ. Eqs.* **261**, 56–101 (2016)
- Lubich, C.: Integration of stiff mechanical systems by Runge–Kutta methods. *Z. Angew. Math. Phys.* **44**, 1022–1053 (1993)
- MacKay, R.S.: Slow manifolds. In: Dauxois, T., Litvak-Hinenzon, A., MacKay, R.S., Spanoudaki, A. (eds.) *Energy Localisation and Transfer*, pp. 149–192. World Scientific, Singapore (2004)
- Menon, G., Haller, G.: Infinite-dimensional geometric singular perturbation theory for the Maxwell–Bloch equations. *SIAM J. Math. Anal.* **33**, 315–346 (2001)
- Rutzmoser, J.B., Rixen, D.J., Tiso, P.: Model order reduction using an adaptive basis for geometrically nonlinear structural dynamics. In: *Proceedings of International Conference on Noise and Vibration Engineering, ISMA* (2014)
- Shaw, S.W., Pierre, C.: Normal modes for non-linear vibratory systems. *J. Sound Vib.* **164**, 85–124 (1993)
- Stumpp, T.: Asymptotic expansions and attractive invariant manifolds of strongly damped mechanical systems. *ZAMM Z. Angew. Math. Mech.* **88**, 630–643 (2008)
- Vakakis, A.F., Gendelman, O.V., Bergman, L.A., McFarland, D.M., Kerschen, G., Lee, Y.S.: *Nonlinear Targeted Energy Transfer in Mechanical and Structural Systems*. Springer, New York (2008)
- Wu, L., Tiso, P.: Nonlinear model order reduction for flexible multibody dynamics: a modal derivatives approach. *Multi-body Syst. Dyn.* **36**, 405–425 (2016)